DESIGN CASE STUDY — OCTOBER 2026

Frank

A project coordination platform for
a small residential architecture office in Montreal

ROLE	TIMELINE	USERS	LOCATION
Product designer, sole builder	7 days	2 architectural technicians	Montreal, QC, Canada

LAFOND ARCHITECTE

David Lafond davidlaf@mit.edu

Background

THE FIRM — SINCE 1989

I learned the trade in my father's office.

He founded the firm in 1989 in the Italian neighbourhood of East Montreal, and it has worked mostly on residential buildings since. He was my first mentor in architecture: I apprenticed at his office, saw how it runs, and learned the business of construction in Quebec.

Through each change in technology the team was restructured: from 10 people at its largest to 2 today.

THE FIRM TODAY

Still working on paper, the old school way.

The lead architect and the senior technician

My father, on the left, and the senior architectural technician review a set at the drafting table.

Sketch first

Details are worked out by hand on paper, then drawn in AutoCAD and SketchUp. Most of the work is still manual.

FROM APPRENTICESHIP TO FELLOWSHIP

Architecture x Computation at MIT

I eventually made my way to Cambridge to push beyond traditional architecture and specialize in computation and product design, developing hands on innovations with leading research labs.

Harvard / MIT Portfolio davidlafond.xyz/work/harvard-mit ↗

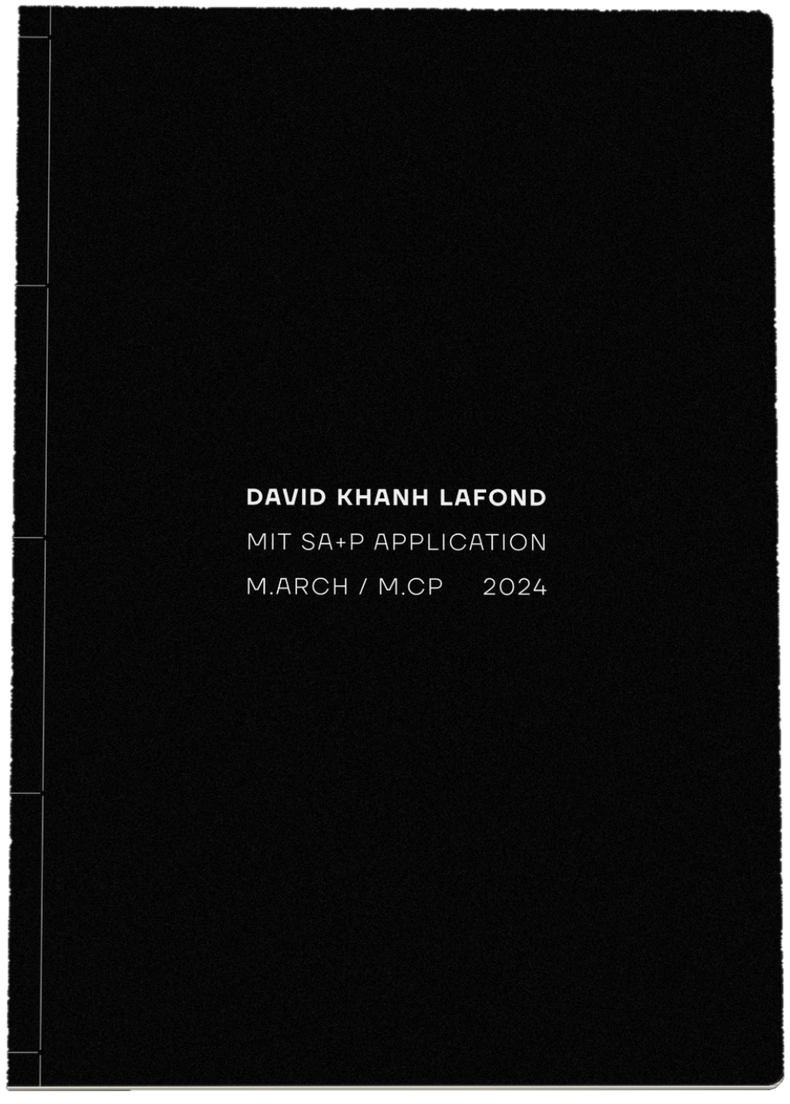

Overview

OVERVIEW

1 office. 2 technicians. 7 days.

THE OFFICE

Lafond Architecte, Québec

A lead architect and two technicians. Condo buildings of 100 to 200 units.

THE TOOLS

AutoCAD and SketchUp

2D plans hold the building. A SketchUp model holds the massing. No interior 3D model.

MY ROLE

Research to running code

Interviews, framing, interaction design, and the prototypes, built in code with AI coding agents.

TESTED WITH

Guy and Benoît

Two technicians with more than 40 years of cumulative experience in the industry.

01

User problem

What are the daily pain points and what costs the most rework time.

02

Process

Three prototypes, two user test rounds.

03

Trade-offs

What I ended up choosing, and what options were left behind.

04

Outcome

Prototype 3: Frank, and what comes next.

TIMELINE — OCTOBER 23-30, 2026

The 1-week design sprint













FRI 23
Intro call

SAT 24
Research

SUN 25
Prototype 1

MON 26
Feedback 1

TUE 27
Prototype 2

WED 28
Feedback 2

THU 29
Prototype 3

FRI 30
Case study

SETTING — INTERVIEWS, OCTOBER 26

A building is drawn twice, by two people, in two programs.

Guy

SketchUp massing, building codes, city approvals.

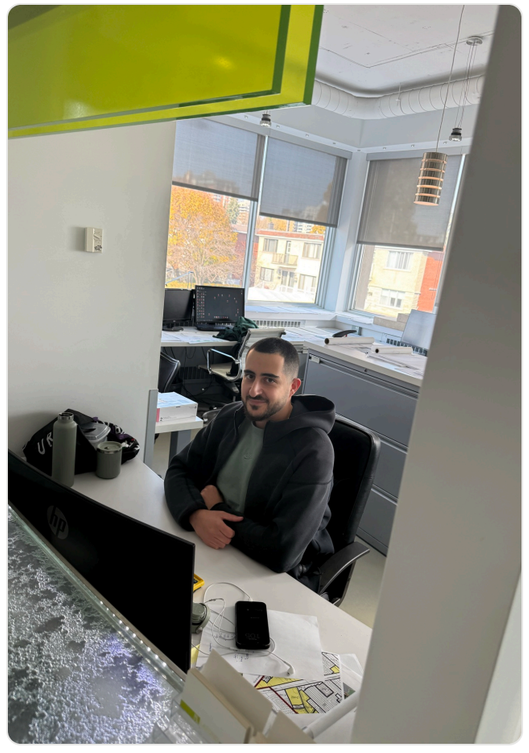

Benoît

AutoCAD plans. The 2D sheets are the source of truth.

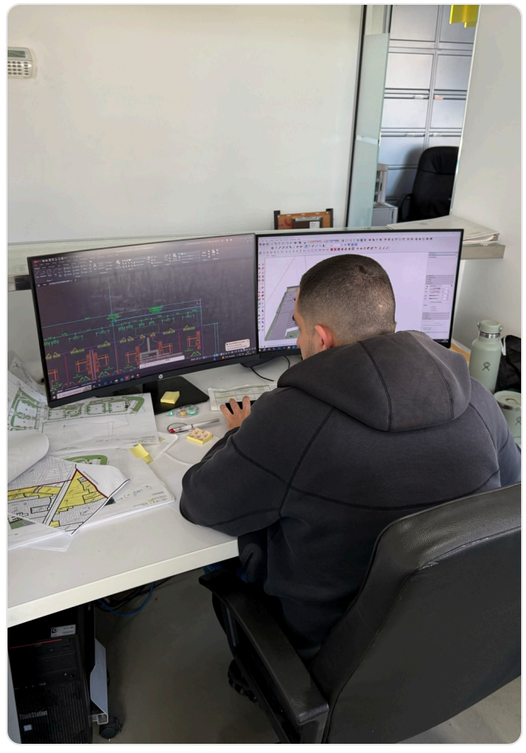

Two programs

AutoCAD and SketchUp. Nothing links them.

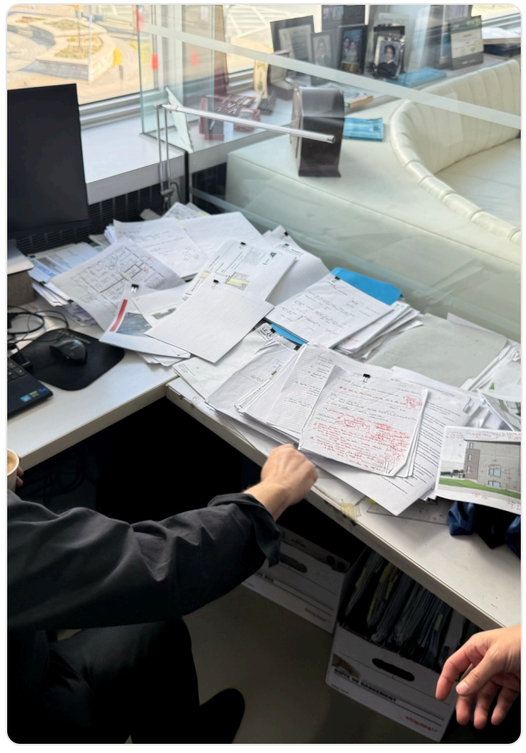

Paper

Notes, changes and the schedule, marked up by hand.

PROBLEM

The plans change every week. History is lost.

The client, the developer, the engineers and the city call to move a wall or cut a unit. The edit goes into the plan. The reason stays in a phone call.

30 cm

A rear setback this short, noticed after submission, costs a resubmission, and a search for who asked.

7 in 10

Client changes that are small cost cuts, asked for by phone or email.

10 pages

Of code study, redone when a change touches glazing, area or unit count.

CHANGES AND THE REASON BEHIND THEM

Why was this changed?

Today	A balcony moves, a window shrinks. Two years later nobody remembers who asked or why.
Should do	Refuse to record a decision without a reason. One line is enough, and it travels with the revi
On screen	After any decision, a short prompt: pick a reason (**client cost**, **structure**, **code**, **city**, **drawing** no reason are visibly marked.

What changed between two revisions

Today	Version tracking is manual, so differences are found by eye.
Should do	List what moved since the last read: which units, which openings, which totals.
On screen	A change log on the project page, newest first, each line pointing at the unit it touched.

Show the knock-on effect of a change

Today	Clients ask for changes to cut cost; roughly seven in ten are small, and some arrive after the
Should do	When a change lands, say what it moves: glazed area, unit count, floor area, and which artic
On screen	A one-line before/after strip under the drawing, linked to the article it touches.

`Interview notes — Oct 26` Both, high priority: « Two years later nobody remembers who asked or why. »

SOLUTION

Give the office a memory of every change.

01

What changed?

F-05-09
Largeur différente de 240 mm
salon / cuisine · travée 1

● ouvert

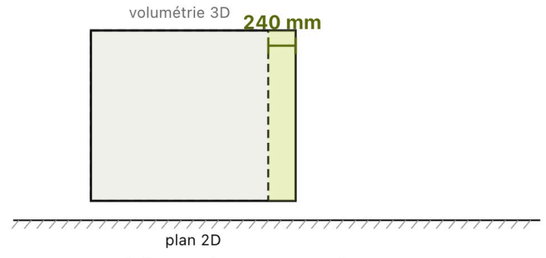

Au plan 2D	1800 × 1500 mm
À la volumétrie	1560 × 1500 mm
Différence	240 mm

Le plan d'étage type porte 1 800 mm depuis R03. La volumétrie porte 1 560 mm.
Apparu avec l'étage type R04 · 24 oct

V1 Each gap names the revision it appeared in.

02

Who asked for it, and why?

MA **Marc-André Gagnon**
Entrepreneur général

Le dégagement devant la porte d'entr
du 507 fait 860 mm, il en faut 900.

plan d'unités — niv. 5 — unité 507 hier

CT **Camille Tremblay**
Chargée de projet

Le balcon du 510 dépasse la ligne d'alignement de 0,4 m.

plan d'unités — niv. 5 — unité 510

lun.

V3 Every comment names who, the unit and the sheet.

03

Do the drawings still agree?

Superposition des plans 8

C-05-21 unité 505 — niv. 5
colonne de chute hors du mur de la salle de bain
architecture × drainage

C-05-22 unité 509 — niv. 5
drain de balcon sans pente vers l'avaloir
architecture × drainage

C-05-31 unité 502 — niv. 5
conduit d'alimentation dans la poutre de rive
architecture × distribution

V3 Overlaps between the drawings, listed per unit.

IDEATION — OCTOBER 24-26

Early flows with AI, then curated on Figma.

I worked out the general concepts with Claude, wrote the user flows as text, then had ChatGPT draw each step as a screen. I plotted every screen on one Figma board, one section per day, one row per flow.

With the interviews in mind, I marked each flow: green if it would help the office, red if not. The green ones I built in Claude Code as prototypes with real clicks.

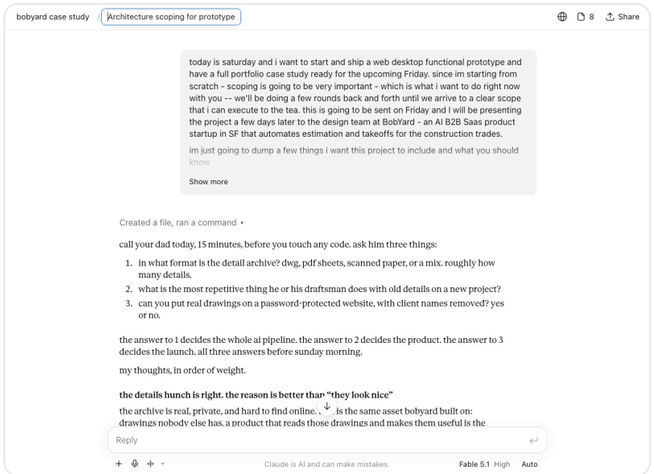

STEP 1

`Claude` — General concepts and scope, before any screen.

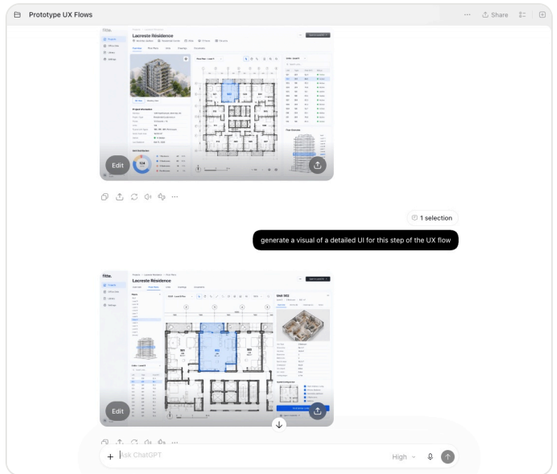

STEP 2

`ChatGPT` — One prompt per step of the flow, one generated screen back.

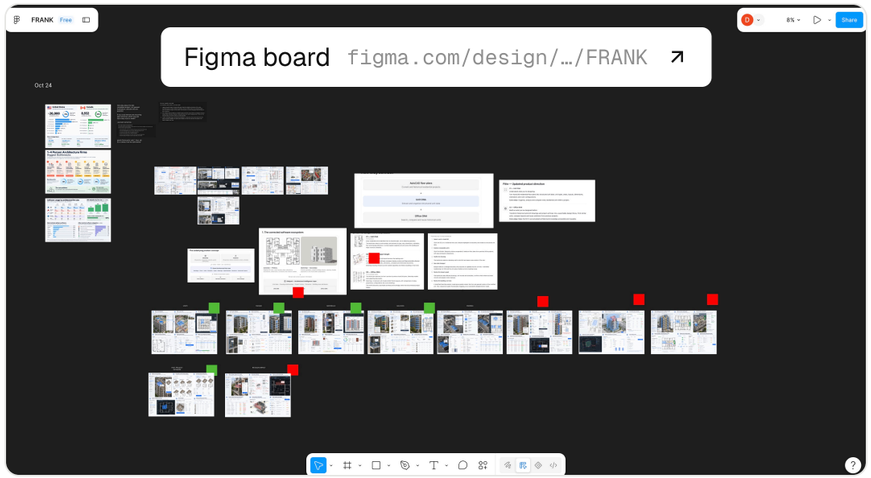

STEP 3

`Figma` — Every screen on one board. Green: keep. Red: drop.

Prototype 01

PROTOTYPE 01

A 2D Drawing - 3D Model Viewer

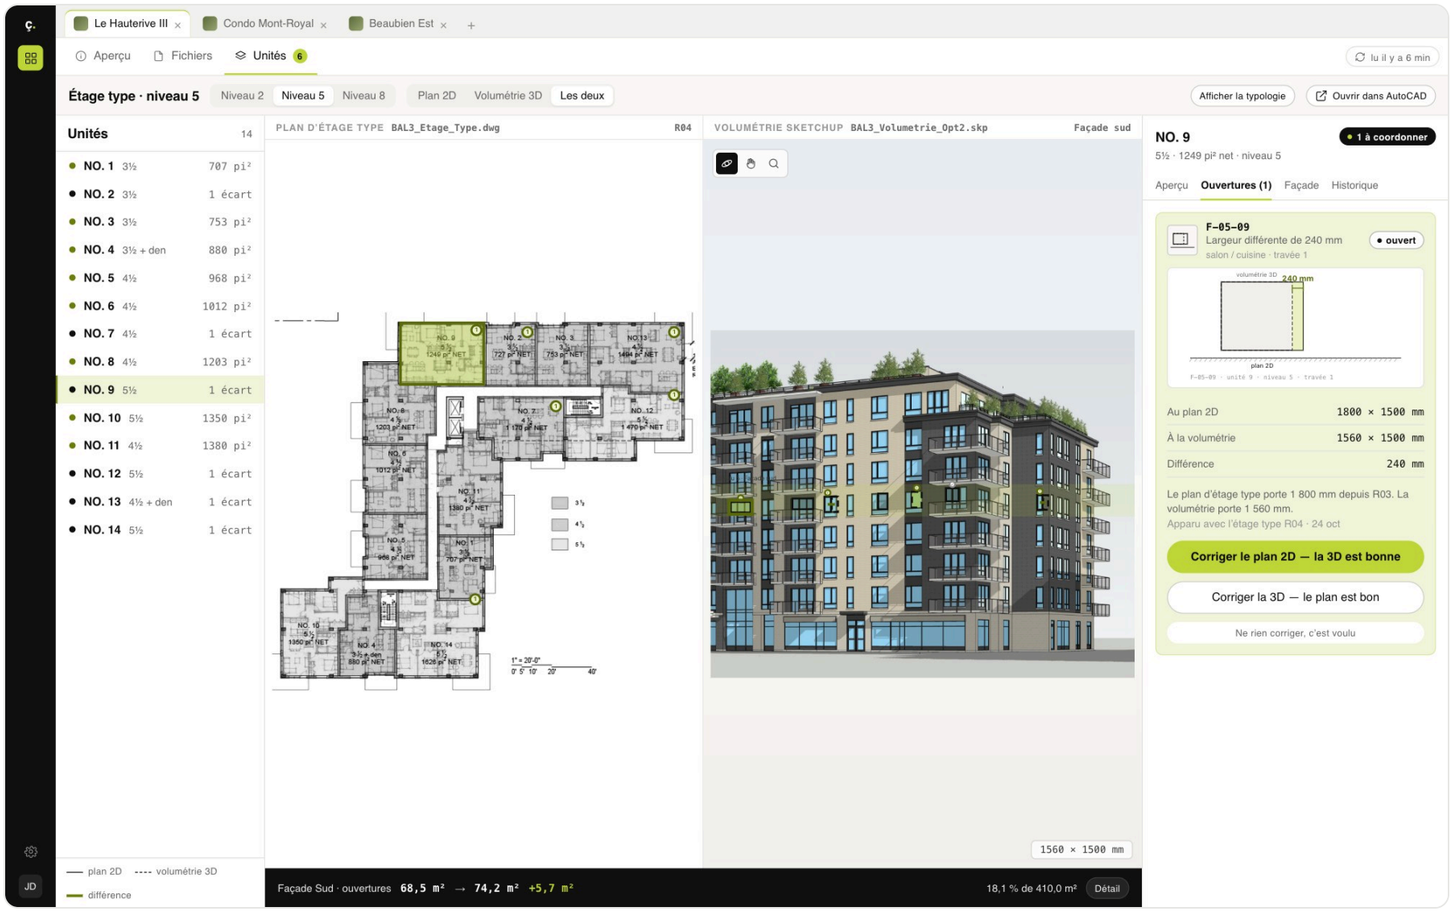

A asked whether one project overview makes information and revisions easier to find. B asked whether connecting the AutoCAD plans to the SketchUp model cuts manual coordination. The interviews on October 26 chose B, but not for the sync. What they wanted from it was a record of every change and who asked for it.

PROBLEMS IT RAISED

- Direction
- Codes

Open prototype 1 `cafitte-prototype1.vercel.app` ↗

PROTOTYPE 01 – GENERAL FLOW

Finding conflicts between 2D-3D

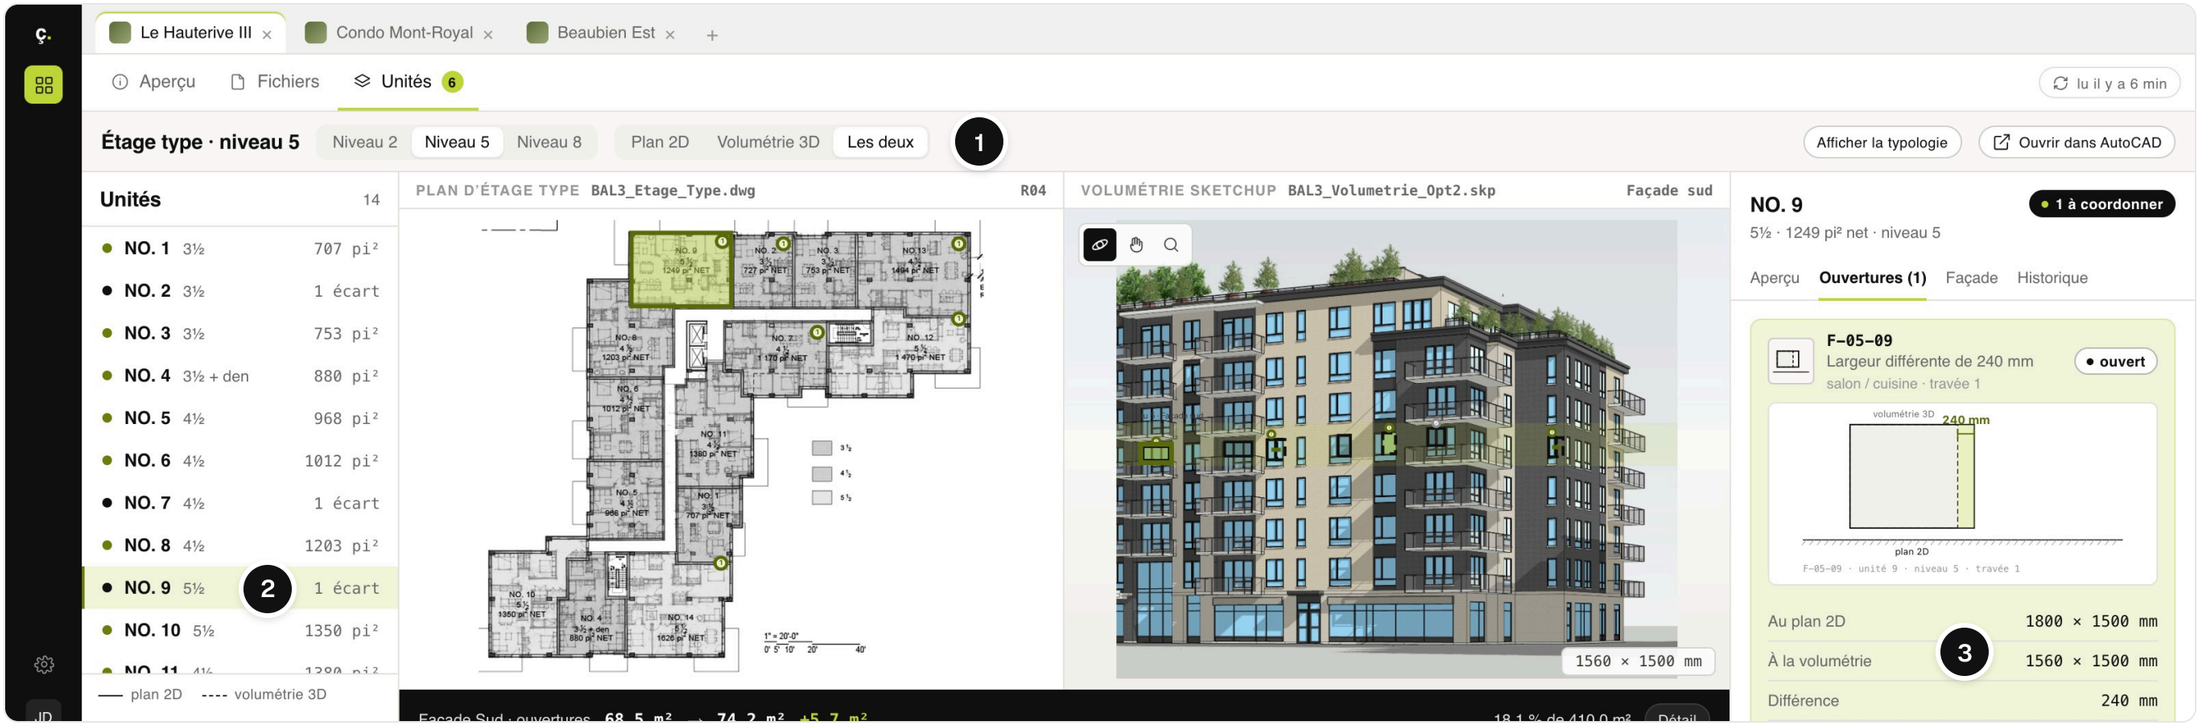

1 **Both drawings, or one.**

Plan 2D, Volumétrie 3D, or the two side by side on the same unit.

2 **A unit is a row or a gap.**

Units with a measured area, and units carrying an « écart » between the two drawings.

3 **The gap is a decision.**

1 800 against 1 560 mm, since R03: correct the plan, correct the model, or keep it.

Feedback 01

FEEDBACK 1 — OCTOBER 26

20 total requests

I wrote down every ask in plain words: what they do by hand today, what the tool should do instead, and what that looks like on screen. Then I ranked them with Guy and Benoît: 9 high, 9 medium, 2 low.

The user requests `/prototypes/interview-features.html` ↗

Counting what is already in the drawings	3	Zoning and building code	6
Changes and the reason behind them	3	Drawings that disagree	3
Keeping the project on rails	2	Showing the project to other people	3

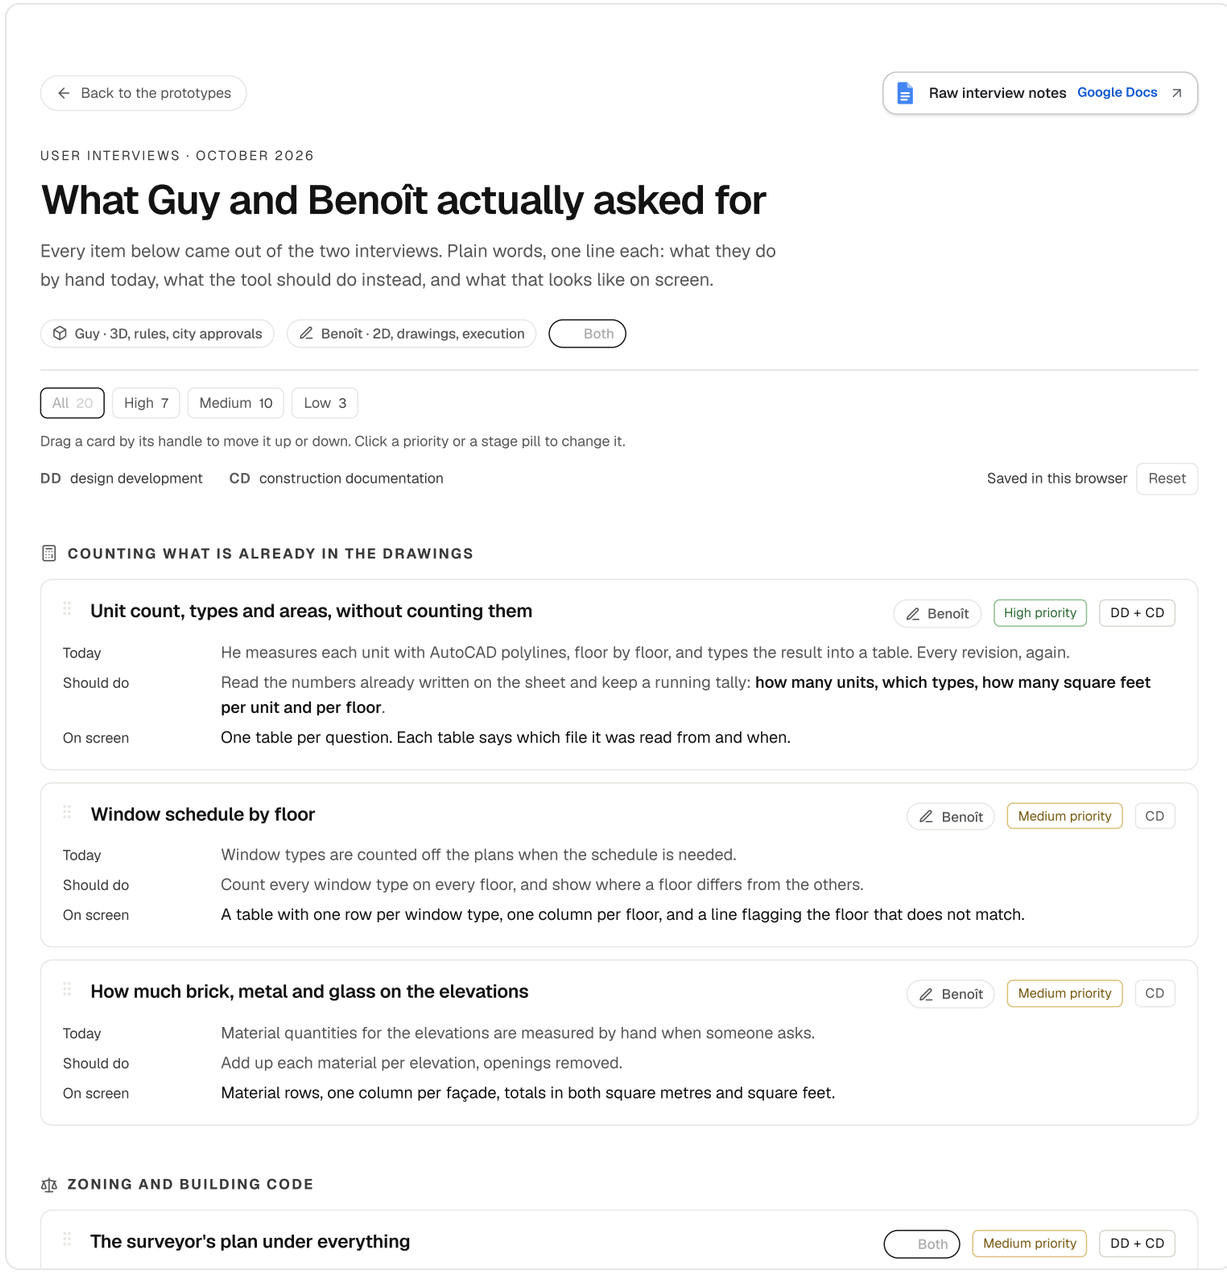

WHICH PRODUCT — DIRECTION

Not the model against the plan. The plans against each other.

THEY SAID

> “We patch the 3D in post. What matters is the 2D: where the engineers’ structural and mechanical plans clash with ours. That is where the revisions are.”

Benoît, on prototype 1 — paraphrased, Oct 26

PROBLEM

Prototype 1 checked the architect's plan against the SketchUp model. That gap gets fixed later, by hand.

REALIZATION

The revisions come from the other offices: a duct or a beam on the engineers' sheet that the architecture does not allow for.

DECISION

Prototype 2 lays the surveyor's and engineers' sheets over the architecture, floor by floor, and marks where they clash.

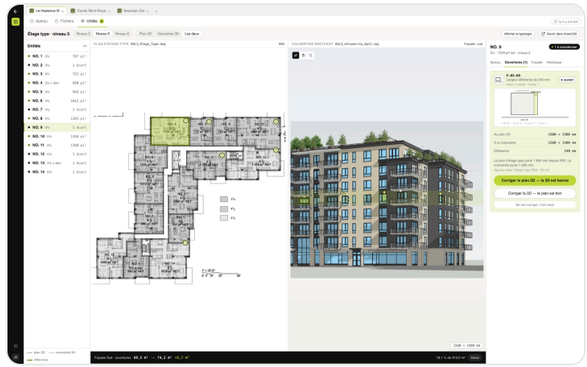

BEFORE

`Prototype 1` — The plan against the model

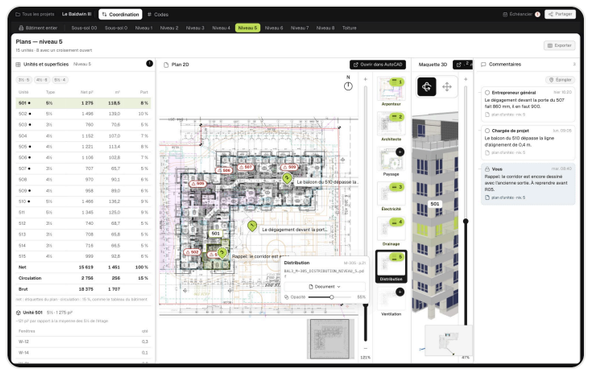

AFTER

`Prototype 2` — The engineers' sheets over the architecture, clashes in red

Prototype 02

PROTOTYPE 02

Added Interactivity

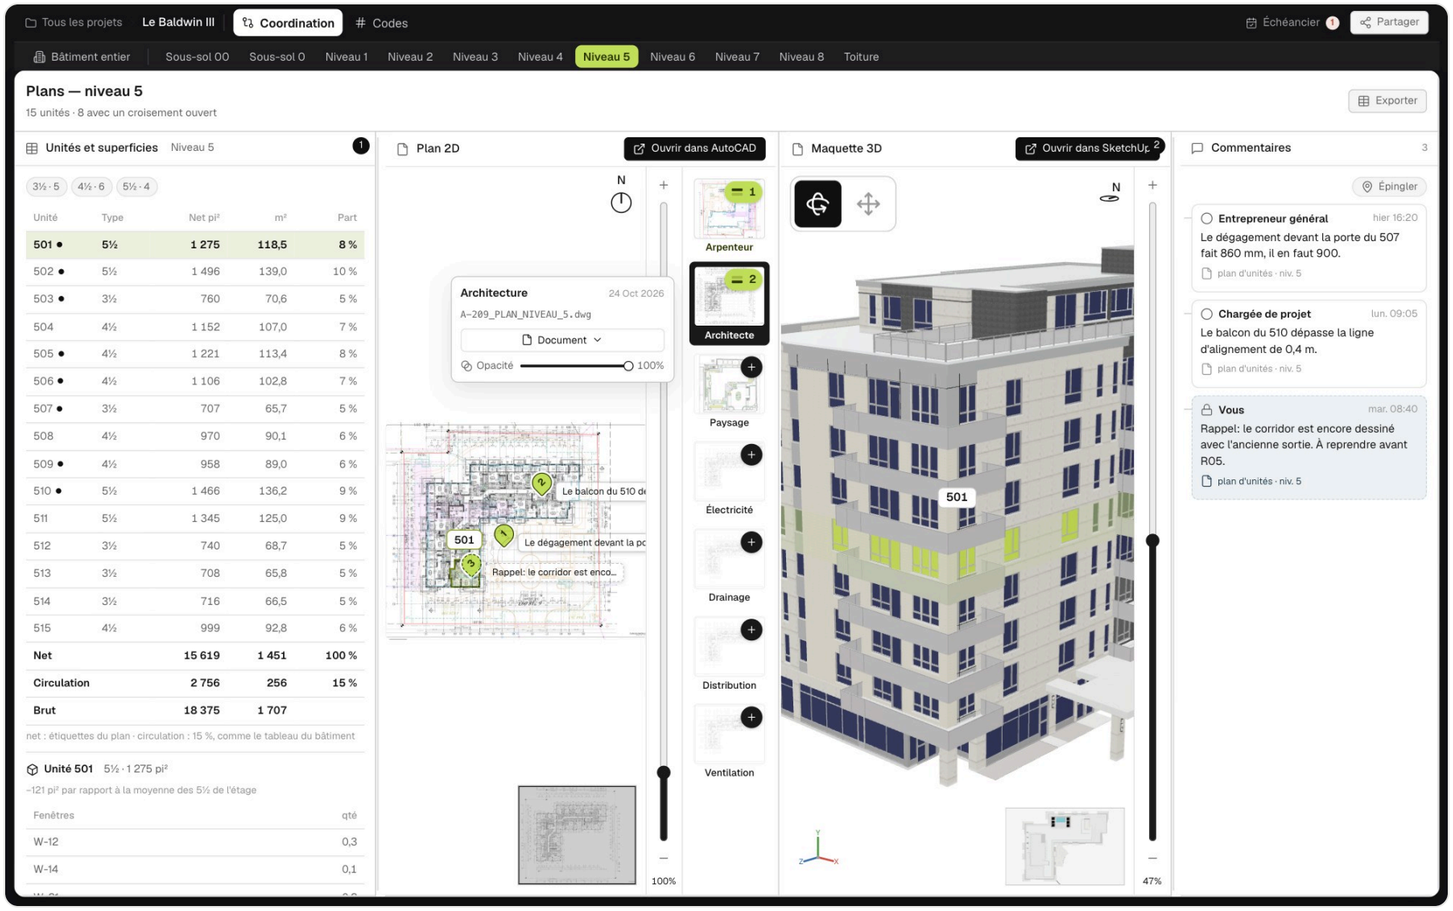

Direction B, rebuilt on the real permit set of a 104-unit building. Selecting a unit anywhere selects it everywhere.

PROTOTYPE 1

Two drawn directions, one invented floor, side by side on the screen.

→

PROTOTYPE 2

One workspace: eight real floors, the SketchUp model, the engineers' drawings as layers.

PROBLEMS IT RAISED

- Navigation
- Tracking
- Room for the drawing
- Reading the plan
- Drawing layers
- 3D model

Open prototype 2 `cafitte-prototype2.vercel.app` ↗

PROTOTYPE 02

Viewing units from different lenses

Bâtiment entier | Sous-sol 00 | Sous-sol 0 | Niveau 1 | Niveau 2 | Niveau 3 | Niveau 4 | **Niveau 5** | Niveau 6 | Niveau 7 | Niveau 8 | Toiture

Plans — niveau 5

15 unités · 8 avec un croisement ouvert

1 **Eight real floors.**
Basement to roof, one tab per level of the permit set.

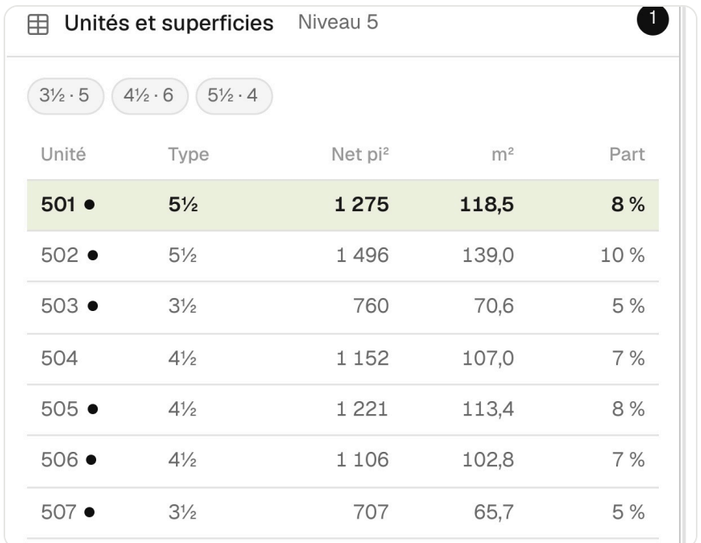

2 **Select a unit to view.**
501 picked in the table…

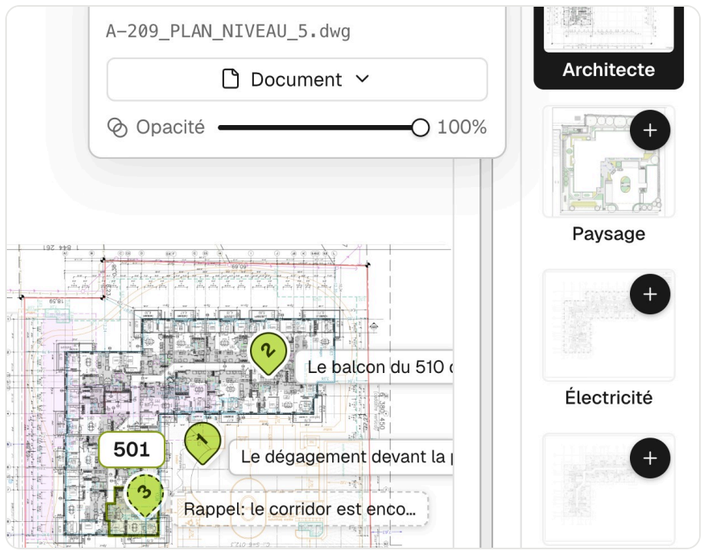

3 **The engineers' drawings as layers.**
…is 501 on the plan, under surveyor, landscape, electrical and drainage.

4 **The Interactive SketchUp model.**
…and 501 on the building, its windows in green.

Feedback 02

TEST ROUND — OCTOBER 28

A few clarifications

Both technicians focused on usability and workflow details rather than new features.

Central finding, prototype 2 testing notes

So prototype 3 added little. It made what was there behave the way an architect expects.

CORE FEEDBACK

01 Tracking
Every note leads back to its project.

02 Drawings
Show one drawing, clearly.

03 Totals
Count the way they count.

Testing prototype 2 with a technician at the office table.

FROM FEEDBACK TO CHANGE

The focus

01 Tracking

Every note leads back to its project.

- The commenting system is unclear GUY
  - → Each comment pins to its unit and sheet; « À l'interne » or « Partagée » is chosen while writing
- A calendar date should open its project GUY
  - → Échéancier on every screen; each task points back to its project and article
- Green should mean progress, not urgency GUY
  - → Red only for what is late; green for today and what is selected

02 Drawings

Show one drawing, clearly.

- The mouse wheel zooms the wrong way BENOÎT
  - → Mouse and trackpad are told apart; each zooms the way its owner expects
- ↔ Let me resize the panels, and zoom further BENOÎT
  - → Every pane resizes and folds; it stops at the width its table needs. Zoom to 1000 %
- Previous drawing versions do not work GUY
  - → Each drawing card lists earlier issues; one click swaps it in, read-only

03 Totals

Count the way they count.

- Totals per material less useful than per façade BENOÎT
  - → Four façade tables, counted in the 3D model, with each maker's product sheet
- Show the unit mix and the total net area BENOÎT
  - → A 3½ / 4½ / 5½ mix bar and the floor's net total above the area table

01 TO-DO LIST

Green doesn't scream priority.

THEY SAID

“Use red and orange for priority, not green.”

Guy — test of prototype 2, Oct 28

PROBLEM

One long list sorted by day. « Haute » was a small green chip, and a date in the calendar led nowhere.

REALIZATION

A to-do list has one job: say what to do next, and where.

DECISION

Red for late, green only for today. Each task points back to its project and article.

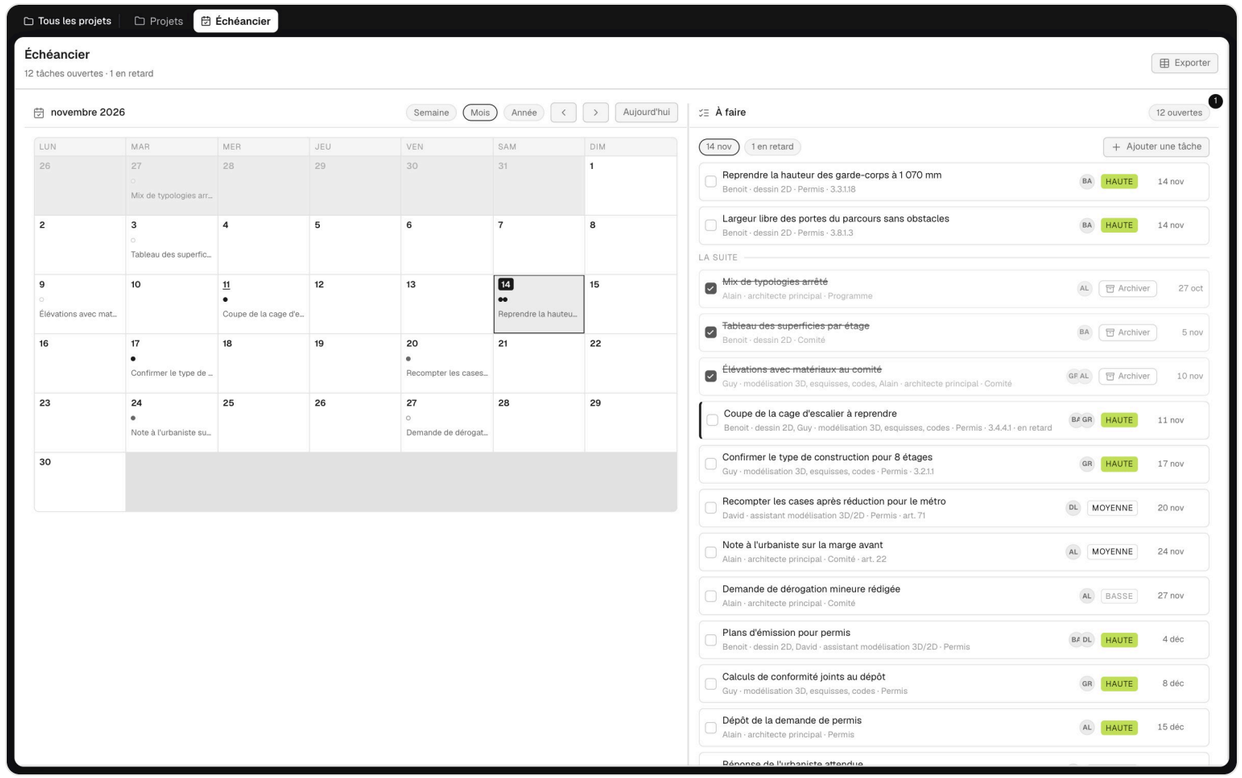

TESTED

`Prototype 2` — Échéancier: one list by day, « Haute » in green

02 DRAWINGS

How to design layer interactivity

THEY SAID

“Opacity controls are unclear.”

Guy — test of prototype 2, Oct 28

PROBLEM

Seven drawings per floor, in a rail that took a column from the plan. Opacity was unclear.

REALIZATION

You read one drawing at a time. The others matter only where they clash.

DECISION

A thin strip of thumbnails. An eye turns a drawing on; the plan marks the clashes in red.

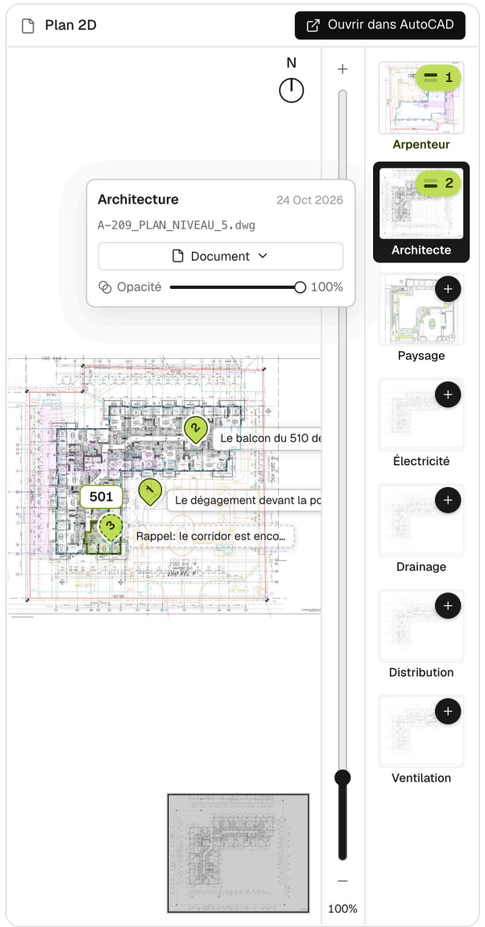

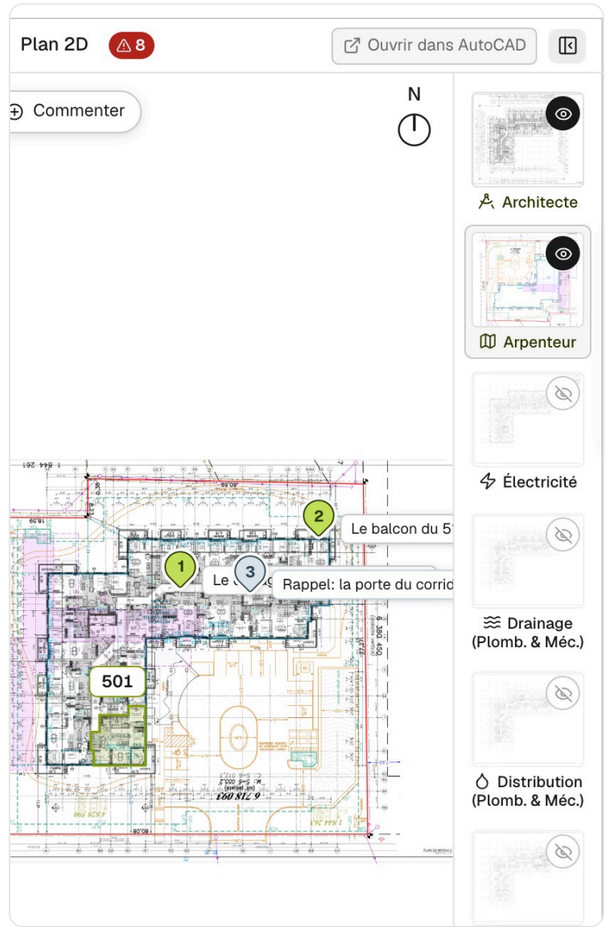

AFTER

`Prototype 3` — An eye lays a drawing on the sheet; the plan counts its conflicts

03 TOTAL STATS

Sticking to conventions

THEY SAID

“Totals per material are less useful than per building façade.”

Benoît — test of prototype 2, Oct 28

PROBLEM One material table for the whole building.

REALIZATION The 3D model already knows each face. It can do the count.

DECISION Four façade tables from the model. Pick a side; the model turns to it.

Statistiques bâtiment entier — 8

Unités et superficies — 104 unités

Niveau 5	15	15 619	1 451,1	14 %
Niveau 6	15	15 619	1 451,1	14 %
Niveau 7	15	15 619	1 451,1	14 %
Niveau 8	13	13 503	1 254,5	12 %
Net	**104**	**108 893**	**10 116**	**100 %**
Circulation		**19 216**	**1 785**	**15 %**
Brut		**128 109**	**11 902**	

Matériaux par façade — 4 — 69 281 pi² vus en élévation

Matériau	N	E	S	O	Total
1 Brique Melville Slik	2 485	2 779	1 074	2 185	8 523
2 Bloc architectural T…	2 429	336	3 718	—	6 483
3 Brique Strata ⚠	3 664	5 187	4 119	4 726	17 696
4 Panneau d'aluminiu…	29	221	339	234	823
6 Solin, marquise et p…	518	576	508	322	1 924
7 Allège fenêtre et po…	346	227	230	222	1 025
8 Fenêtre et porte-pa…	1 619	1 175	1 524	1 210	5 528
9 Vitrage	4 632	3 468	4 608	3 663	16 371
10 Garde-corps	3 431	1 923	3 027	2 527	10 908
Total	**19 153**	**15 892**	**19 147**	**15 089**	**69 281**

Statistiques bâtiment entier — 8

Unités et superficies — 104 unités

Niveau 6	15	15 619	1 451,1	14 %
Niveau 7	15	15 619	1 451,1	14 %
Niveau 8	13	13 503	1 254,5	12 %
Net	**104**	**108 893**	**10 116**	**100 %**
Circulation		**19 216**	**1 785**	**15 %**
Brut		**128 109**	**11 902**	

Matériaux par façade — 4 — 69 281 pi² vus en élévation

Matériau	pi²	Part	Répartition
1 Brique Melville Slik	8 523	12 %	
2 Bloc architectural Tapestry	6 483	9 %	
3 Brique Strata ⚠	17 696	26 %	
nord **3 664** est **5 187** sud **4 119** ouest **4 726**			
4 Panneau d'aluminium série 300	823	1 %	
6 Solin, marquise et parapet	1 924	3 %	
7 Allège fenêtre et porte-patio	1 025	1 %	
8 Fenêtre et porte-patio	5 528	8 %	
9 Vitrage	16 371	24 %	
10 Garde-corps	10 908	16 %	
Enveloppe	**69 281**	**100 %**	

EXPLORED

`batiment-statistiques.html` — Totals per floor, then each material per façade: 69 281 ft² in all

Prototype 3

PROTOTYPE 03

Improving the UX

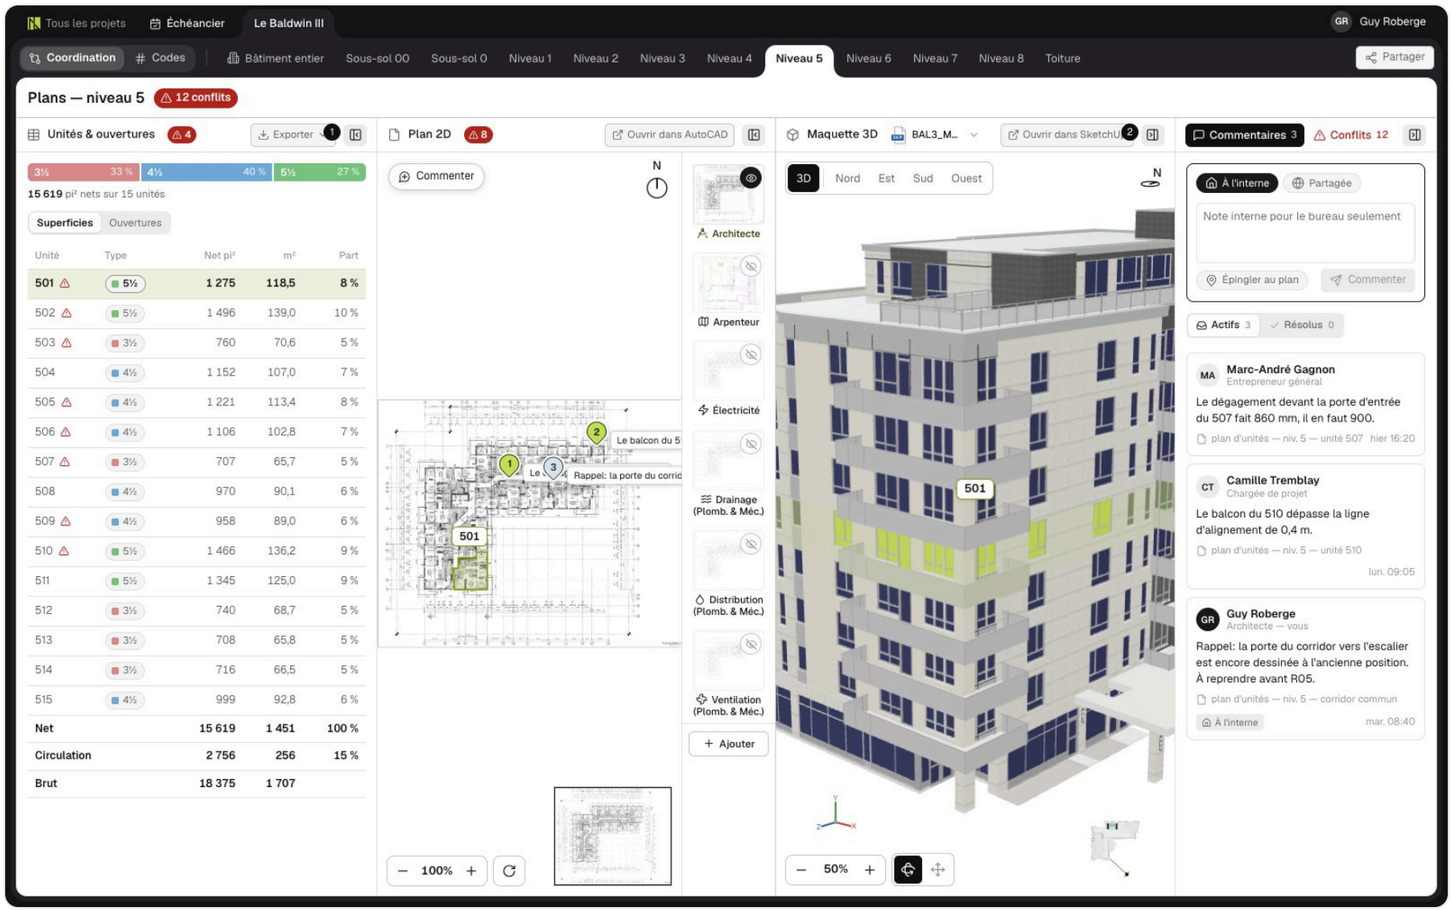

Frank keeps C's single floor and fixes how it is used day to day: quantities where the units are, a schedule across projects, comments that know who can read them, and panes that never crop a number.

PROBLEMS IT RAISED

- Quantities
- Schedule
- Comments
- Panes

Open Frank `hey-its-frank.vercel.app` ↗

PROTOTYPE 03 — LAYERS

Every other trade sheet, laid over the architecture.

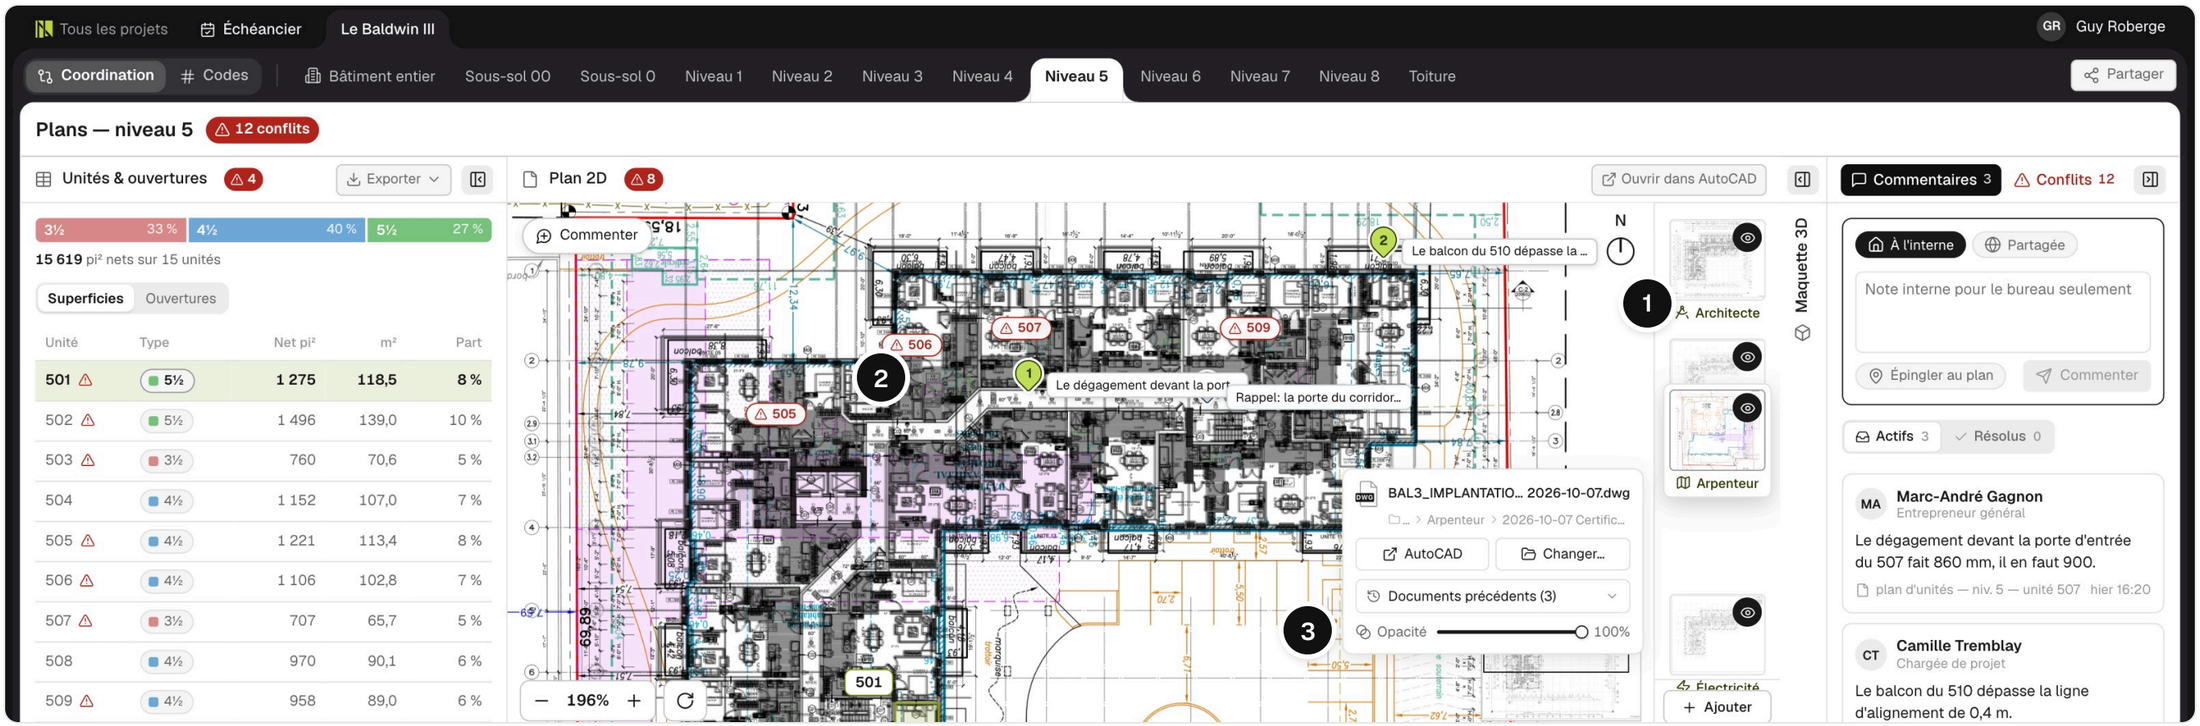

1 Every sheet in one pile.

Architecture, surveyor, electrical, drainage, distribution and ventilation. Each one turns on with its eye.

2 Drawn over each other.

The sheets that are on sit over the architecture at the same scale, so a pipe reads against its wall.

3 Drag to reorder.

The pile reads top to bottom: drag a sheet up to bring it to the front. Its card names the file, its earlier versions and its opacity.

PROTOTYPE 03 — QUANTITIES

Visualizing ratios through color.

THEY SAID

“Show the 3½ / 4½ / 5½ mix and the total net area. Quantities per façade beat totals.”

Benoît — test of prototype 2, Oct 28

PROBLEM

Quantities sat on a separate overview screen. On a floor, the pane listed the fifteen units twice: once for areas, once for openings.

REALIZATION

The list of units already is the table of quantities. Six ways to write each unit once showed a switch was enough.

DECISION

The unit list is the area table: net ft², m², share, then net, circulation and gross, with the mix bar above and a Superficies / Ouvertures switch. Materials get a table per façade.

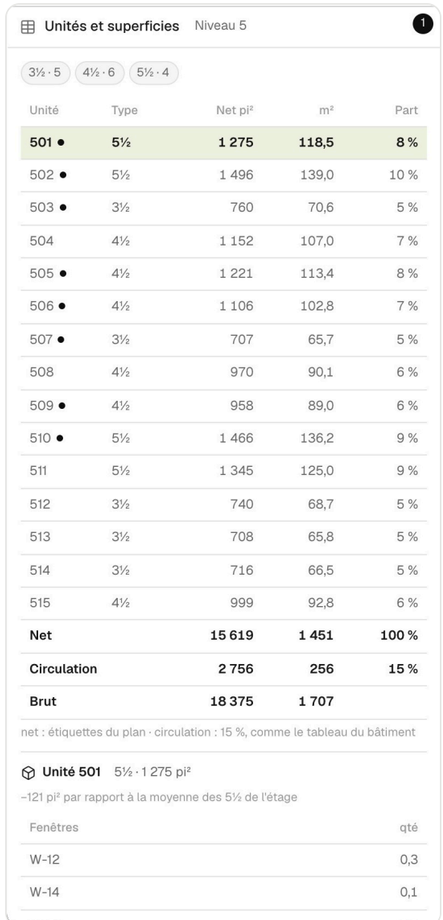

BEFORE

`Prototype 2` — The area table, then the unit's openings listed again below

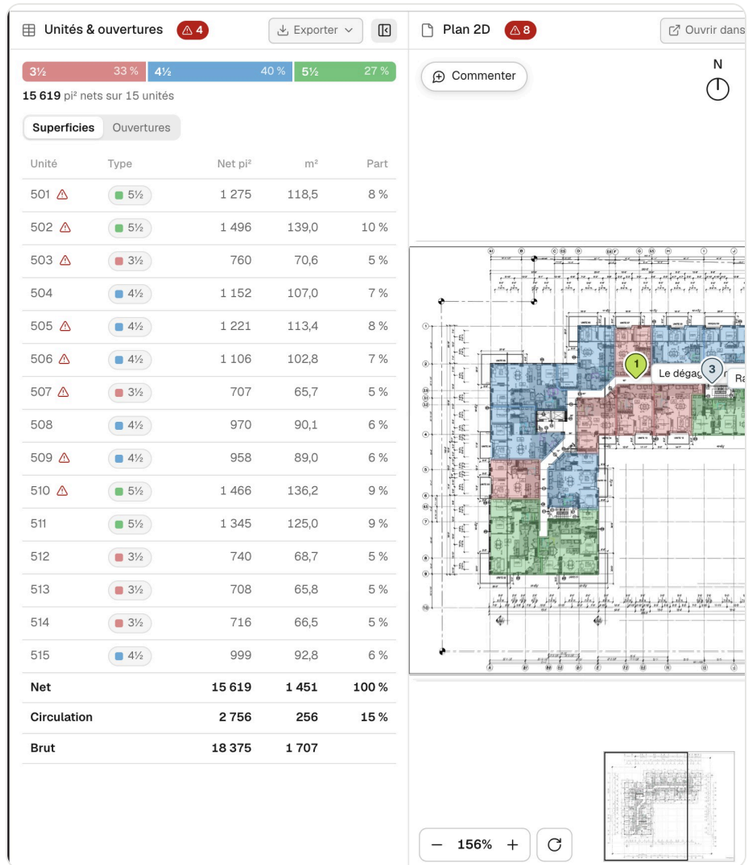

AFTER

`Prototype 3` — The mix bar above, a Superficies / Ouvertures switch, and the same three colours on the plan

PROTOTYPE 03 — THE FLOORS

Stats, 2D, 3D, comments

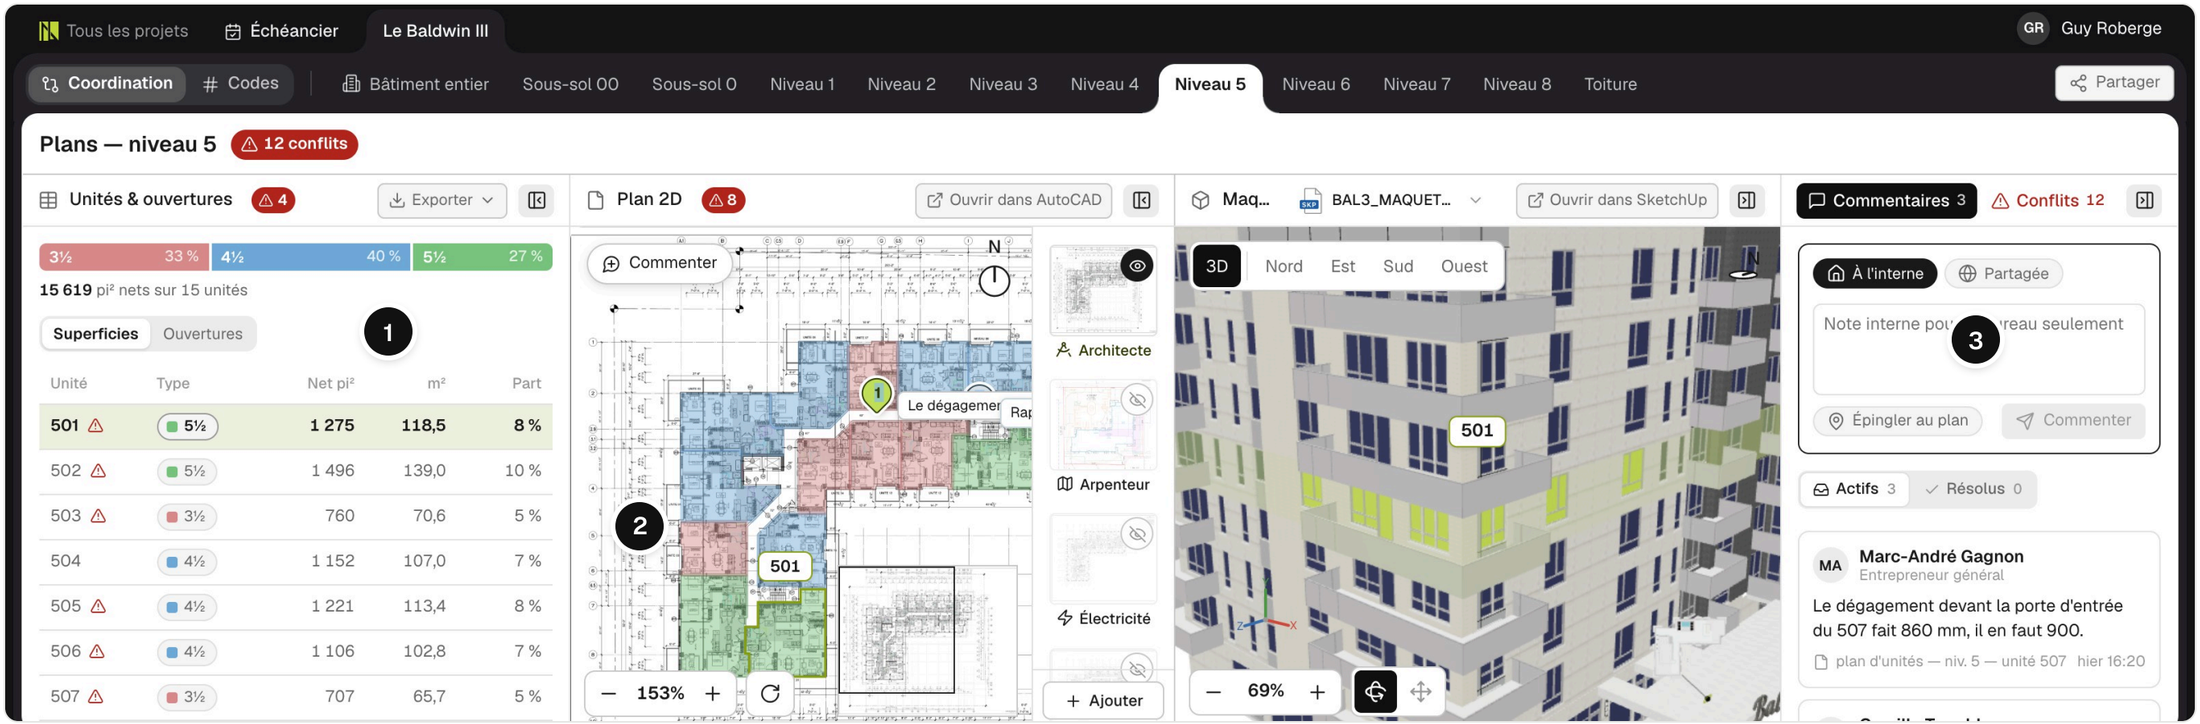

1 Counted, not typed.

Net area, type and share per unit, with the floor's mix and totals. Red marks a unit with an open conflict.

2 The mix, on the plan.

Each unit is filled by type: 3½ red, 4½ blue, 5½ green. Pick 501 anywhere and the other views follow.

3 Comments pinned to the drawing.

Internal or shared, each tied to a unit and a sheet.

PROTOTYPE 03 — ELEVATIONS

Material data per facade.

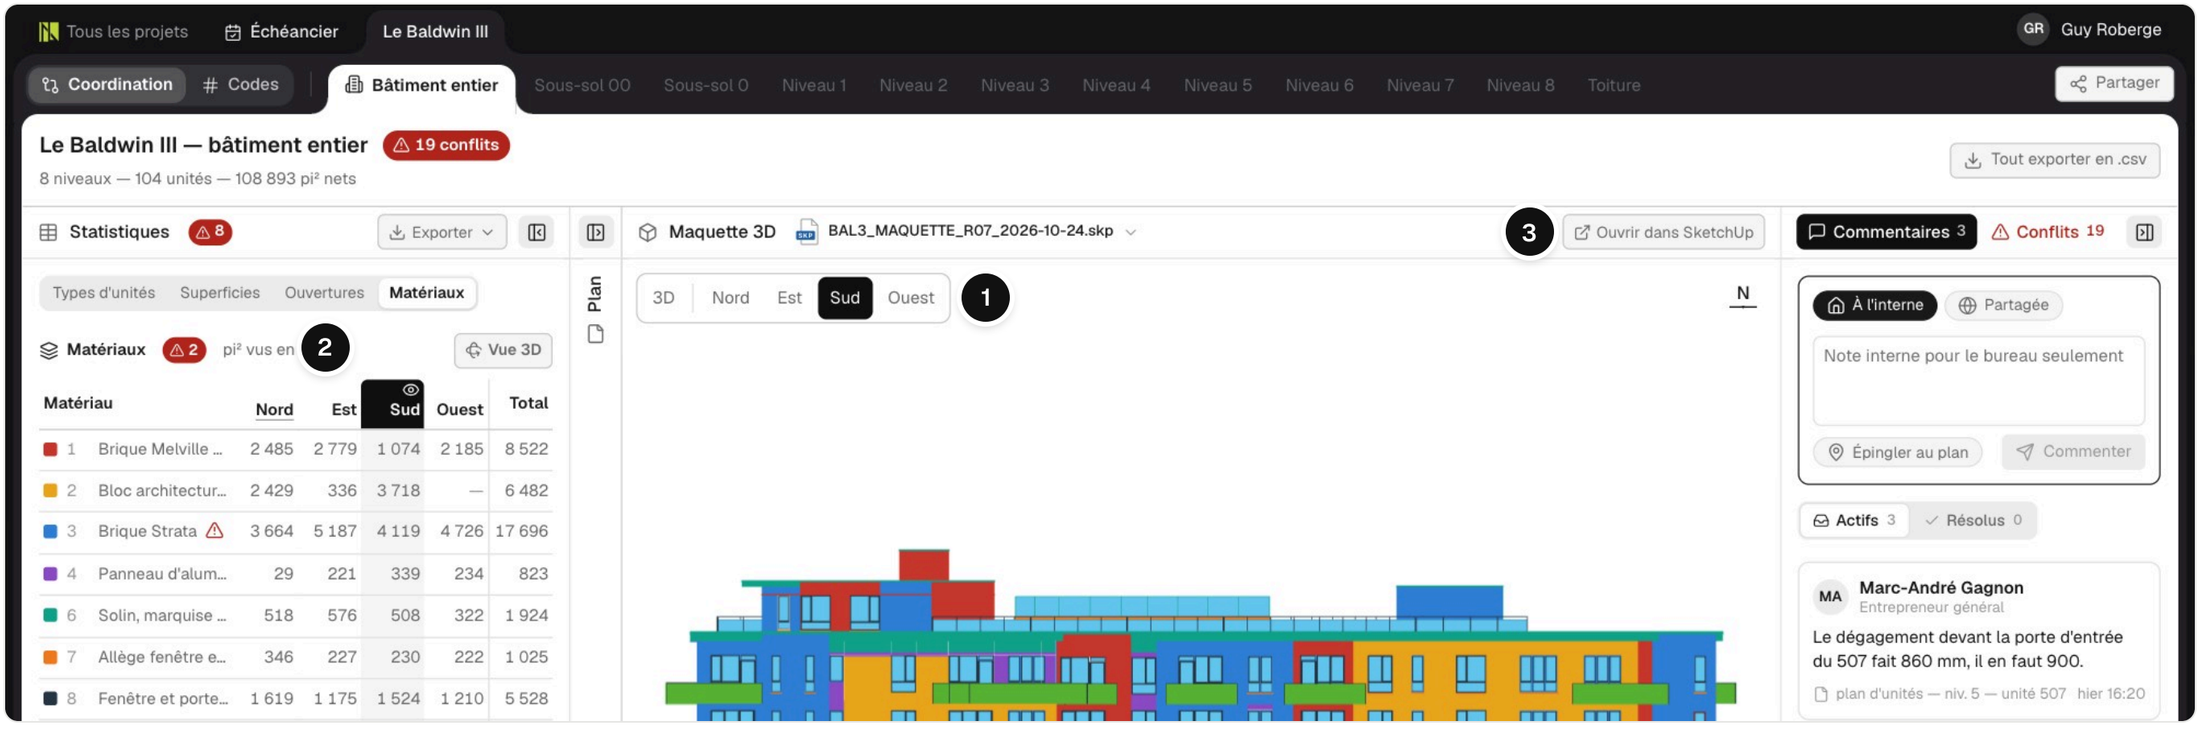

1 One façade, square-on.

3D, North, East, South, West: one click each. Each material keeps its colour.

2 Counted per façade.

The Materials table gives each material's area on each side. The open side is lit.

3 Handed to SketchUp.

"Open in SketchUp" passes the view to the host program, simulated in this prototype.

PROTOTYPE 03 — CONFLICTS

One click to the conflicting drawings.

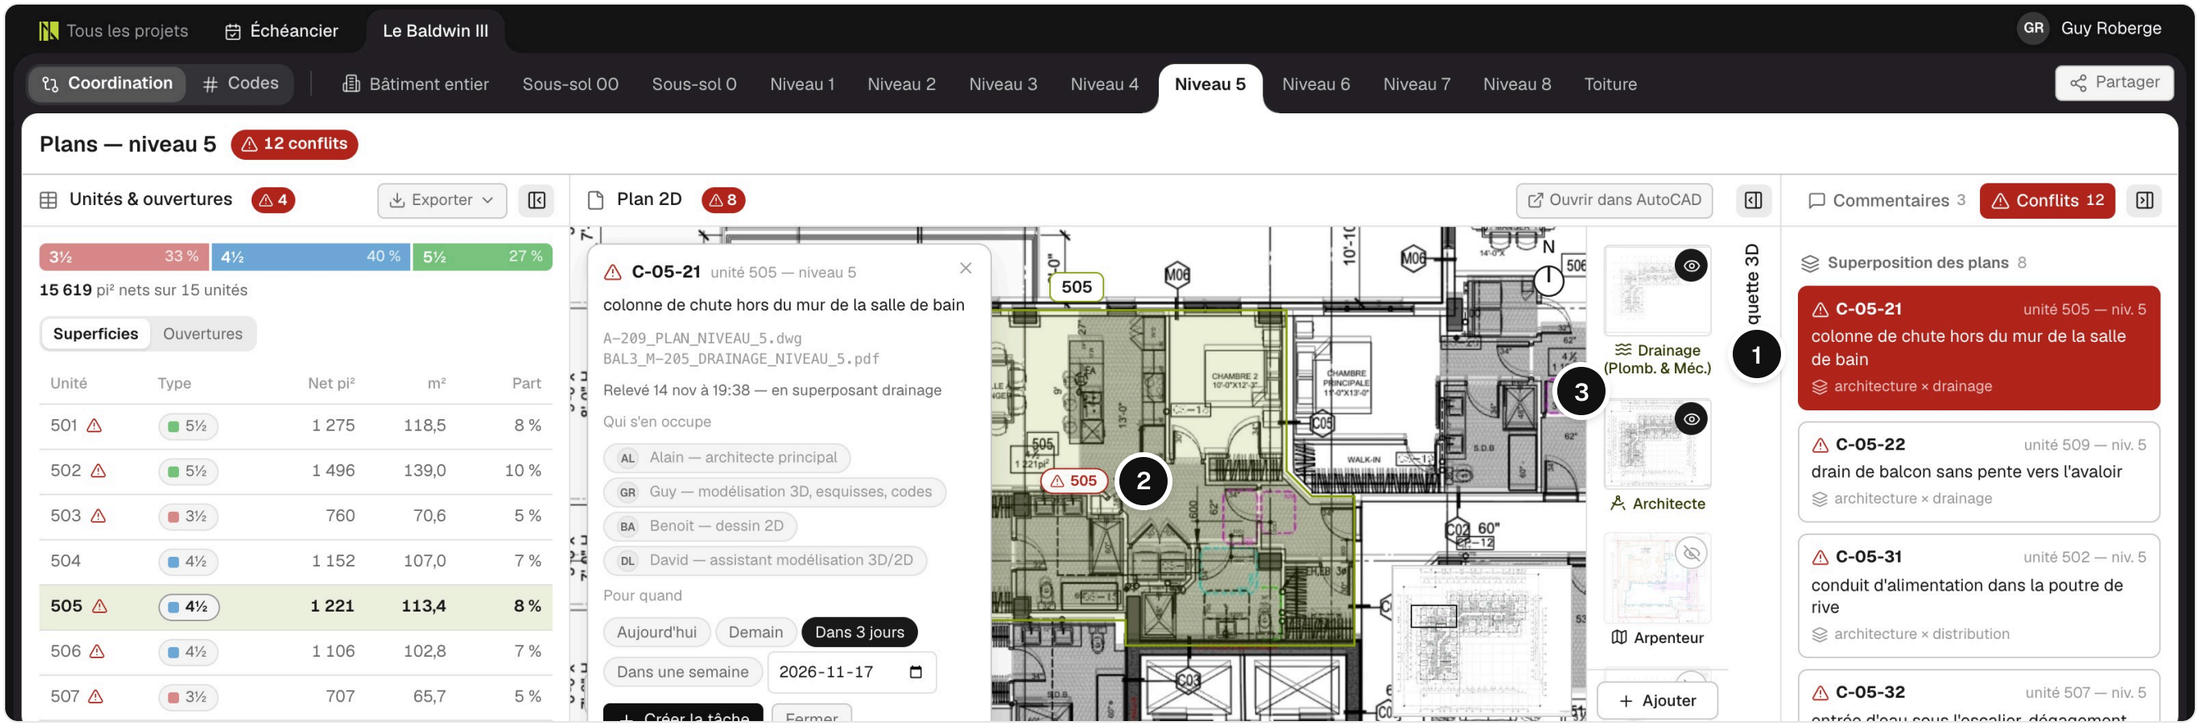

1 **Every problem in one list.**

Unit conflicts, engineering overlaps and material mismatches, counted on the title, the panes and the façades.

2 **Opens the evidence.**

A conflict turns on exactly the two drawings involved and zooms to the unit.

3 **43 engineering sheets**

registered on the architecture: electrical, drainage, plumbing, ventilation.

PROTOTYPE 03 — CODES

The code study as a reference library

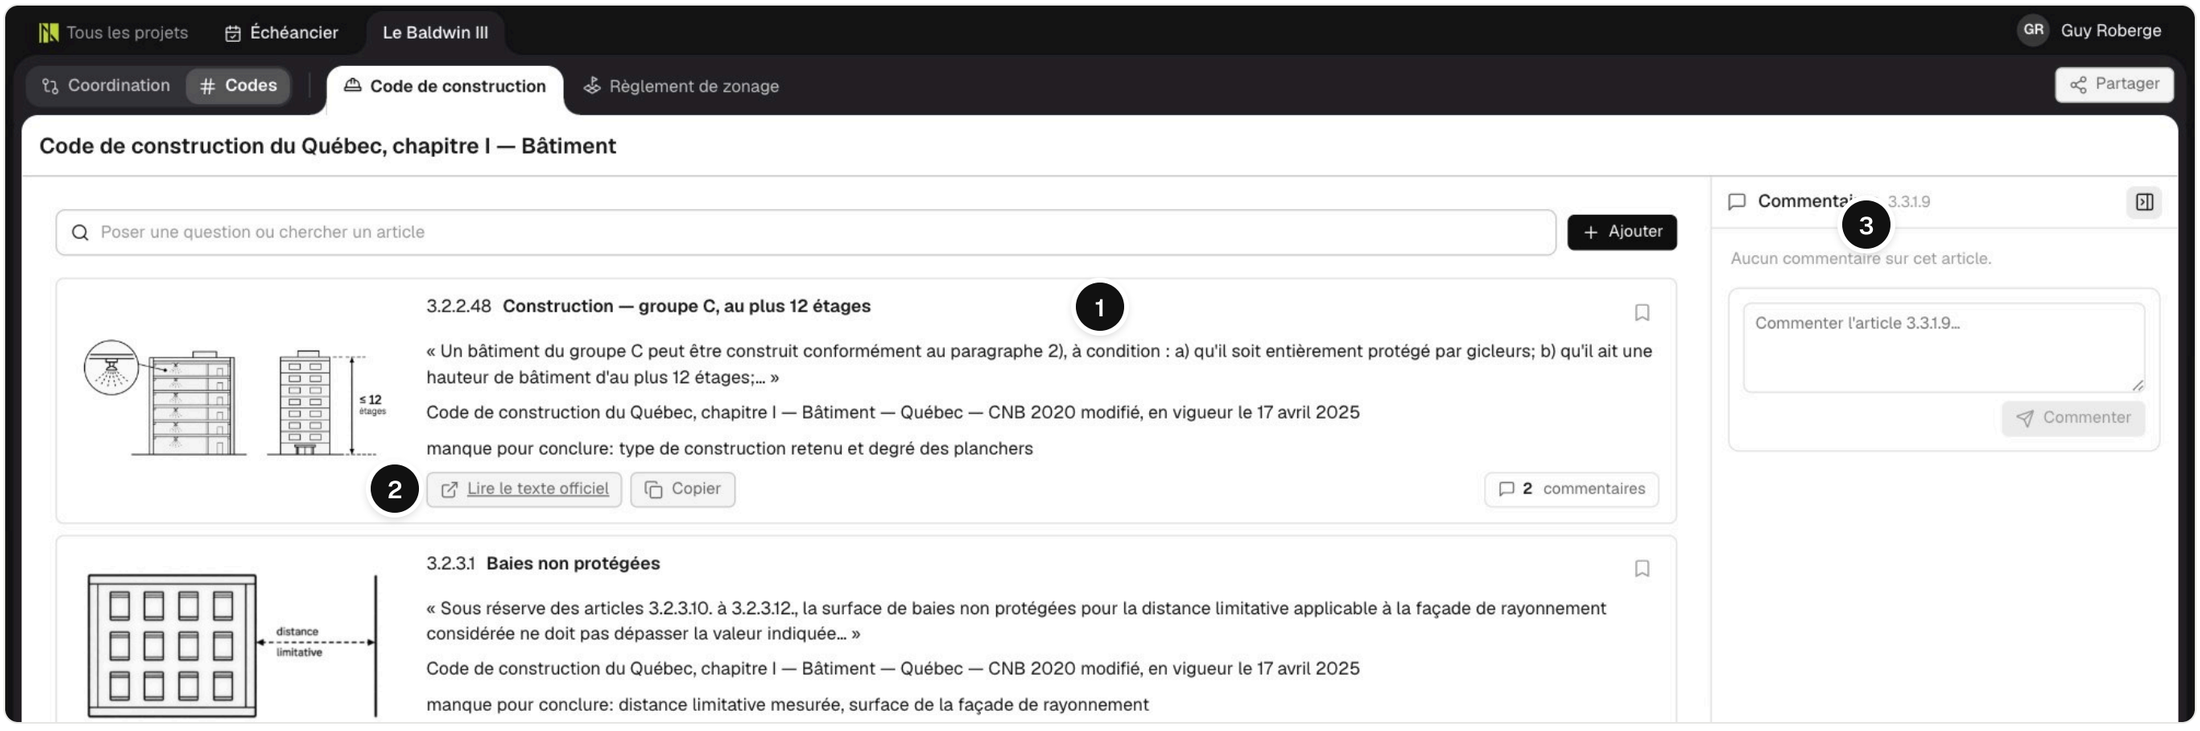

1 Article, quote, what is missing.

Each card names the input still needed to conclude.

2 The official text, at the article.

Links open the provision itself, at its exact page.

3 The people involved.

Comments per article, and the borough, the RBQ and the planner one click from an email.

PROTOTYPE 03 — SCHEDULE

Green doesn't scream priority.

THEY SAID

“Clicking a calendar date should show the project information. Use red and orange for priority, not green.”

Guy — test of prototype 2, Oct 28

PROBLEM

Échéancier sat among one project's tabs, and its month grid only answered « when is it due ».

REALIZATION

Six calendars judged on four questions: what is due, what is late, what is mine, how long until filing. And a week of work crosses four projects, so the schedule cannot live inside one.

DECISION

Échéancier sits top right on every screen: a calendar and one to-do list grouped by day. Each task belongs to one of four people and points at its article. Red only for what is late.

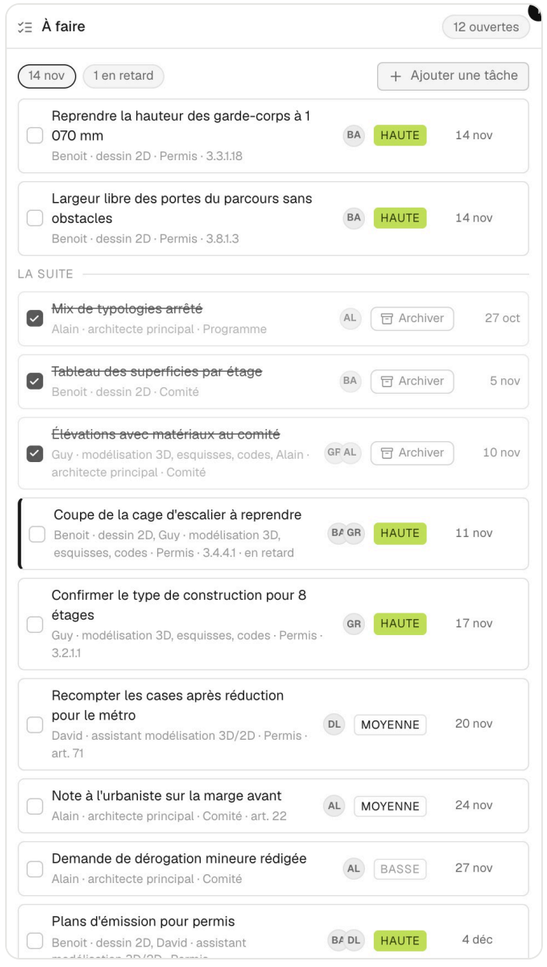

BEFORE

`Prototype 2` — Every task flagged in green

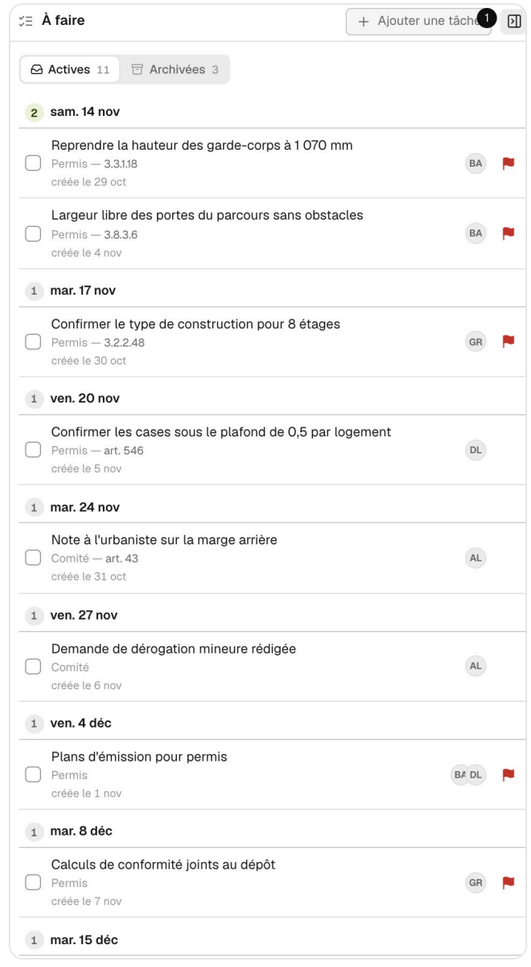

AFTER

`Prototype 3` — Grouped by day; red for what is late

PROTOTYPE 03 — TRACKER

Deadlines that lead back to the project.

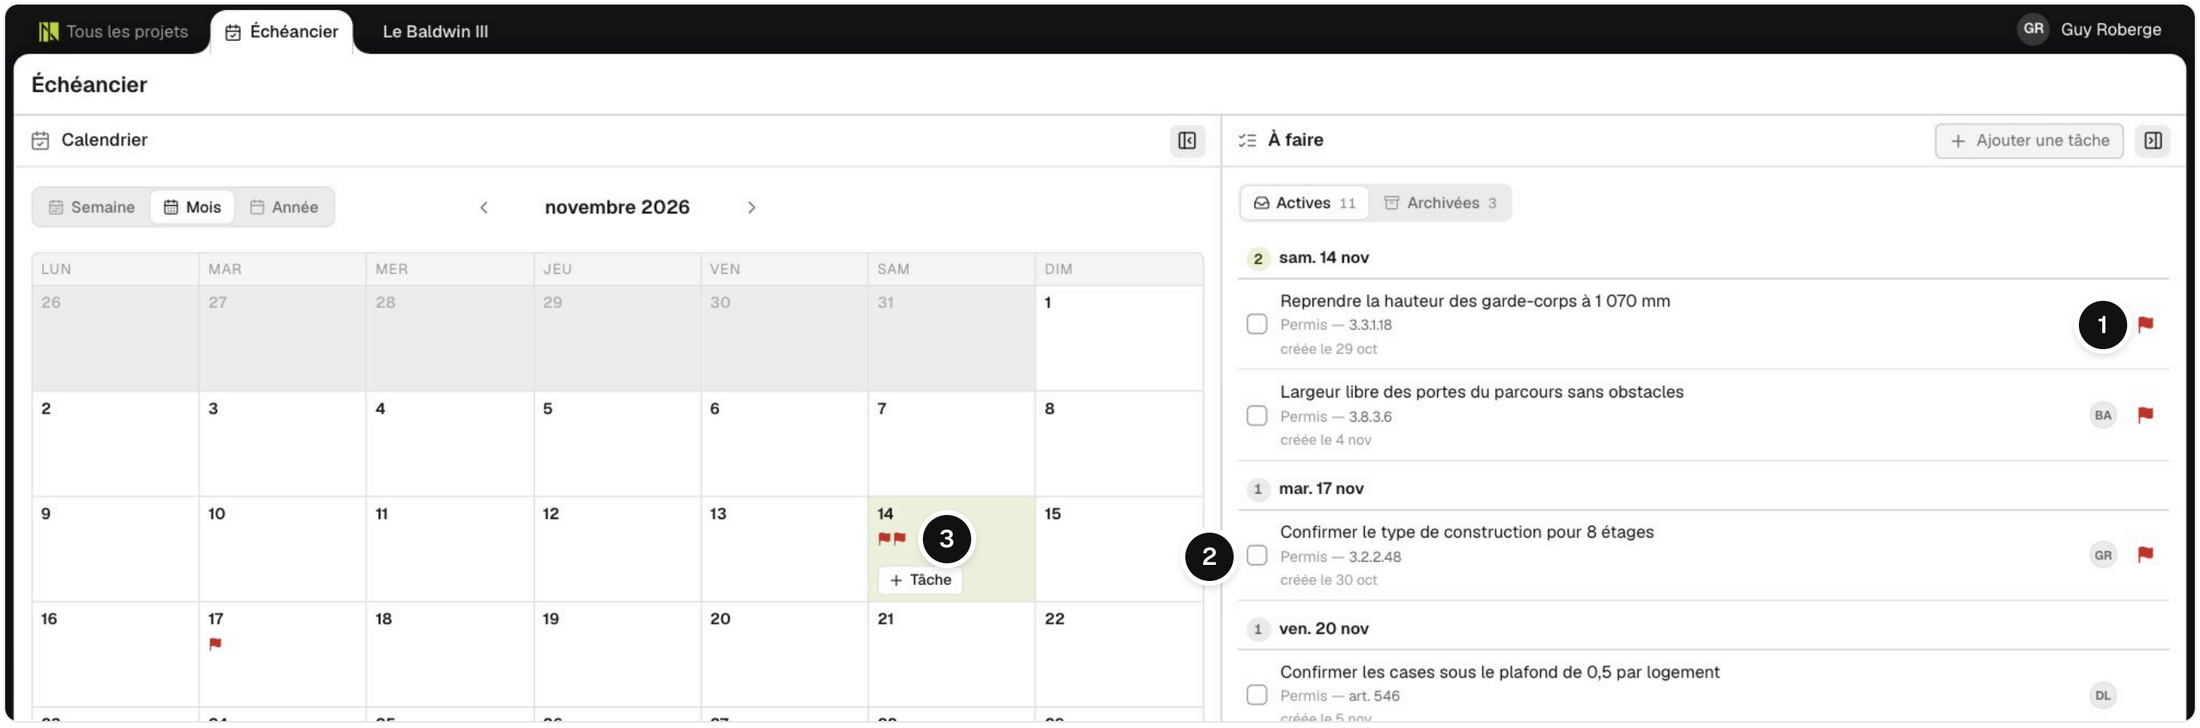

1 Assigned to the studio's four people.
Outside parties are followed by who holds the task.

2 Each task points at its article.
Guard height, corridor width, construction type.

3 Quiet by default.
Pale green for today, red only for what is late.

Trade-offs

TRADE-OFF 01 — TOOLS

Keep AutoCAD and SketchUp. No Revit.

Revit, BIM

- ✓ One model, clean data to read
- ✗ Months of training for three people
- ✗ Every project template redrawn
- ✗ More than a condo building needs

AutoCAD and SketchUp

- ✓ Used by the office for years
- ✓ No training, no new licences
- ✓ Enough for 100 to 200 condo units
- ✗ Data arrives as PDF and DWG sheets

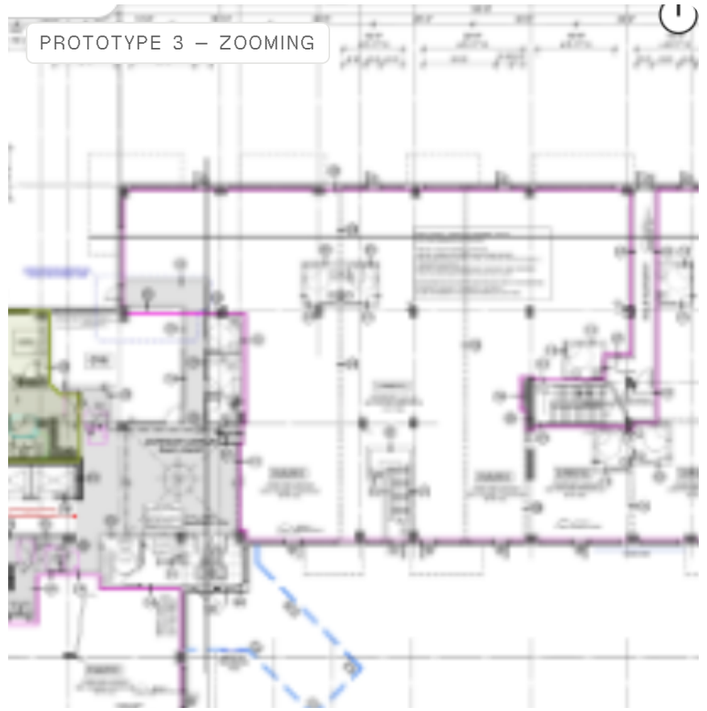

INSTEAD OF

Asking the office to move to BIM.

I CHOSE

Frank reads the files the office already makes.

THE COST

Heavy sheets. Plans blur while it zooming in.

Cost. This prototype alone loads 32 PDF sheets: 98 MB, up to 8 MB each. Storing, indexing and archiving them is the hardest part of the backend.

TRADE-OFF 02 — INTEGRATION

Frank points to AutoCAD. It does not plug into it yet.

PROTOTYPE 1 — OCT 25

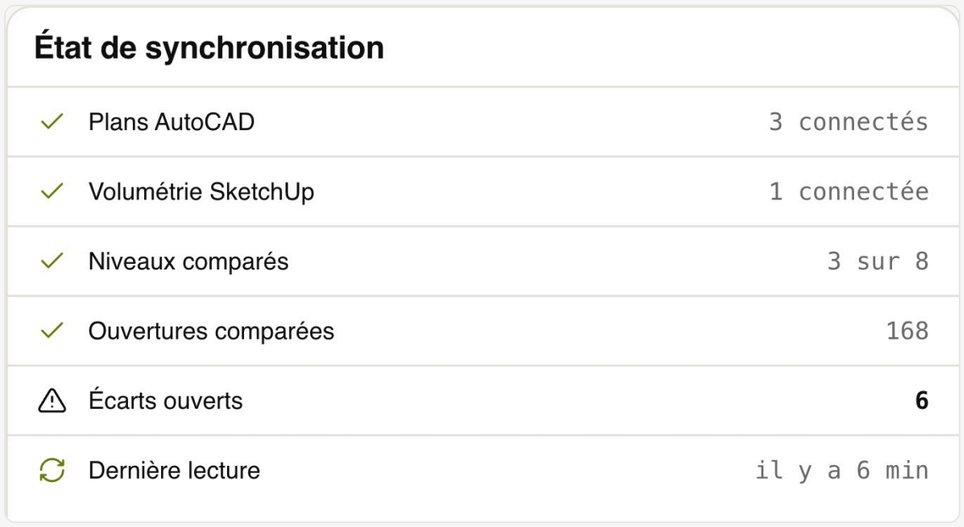

PROTOTYPE 3 — OCT 29

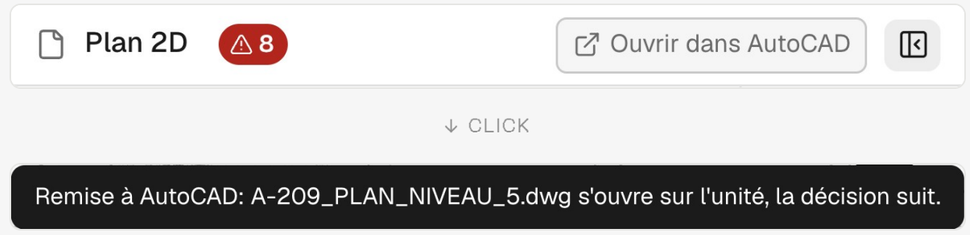

INSTEAD OF

A live sync. Prototype 1 showed the files as "connected", but making that true needs a plug-in for each program.

I CHOSE

A web app that reads the drawings. "Open in AutoCAD" opens the same sheet on the same unit, where the change is made.

Cost. Nothing syncs back. In the prototype the button is simulated, and the screen says so. Plug-ins are the next engineering task.

TRADE-OFF 03 — TRUST

Keeping the judgment to humans.

PROTOTYPE 1 — OCT 25

Au plan 2D	1800 × 1500 mm
À la volumétrie	1560 × 1500 mm
Différence	240 mm

Le plan d'étage type porte 1 800 mm depuis R03. La volumétrie porte 1 560 mm.

Apparu avec l'étage type R04 · 24 oct

Corriger le plan 2D — la 3D est bonne

Corriger la 3D — le plan est bon

Ne rien corriger, c'est voulu

PROTOTYPE 3 — OCT 29

INSTEAD OF

One click that rewrites the plan or the model.

I CHOSE

A communication-first tool. A technician makes the change in AutoCAD.

Cost. One extra step per change. One broken plan would have cost the office's trust.

TRADE-OFF 04 — CODES

A reference, not a verdict.

PROTOTYPE 3 — ARTICLE 3.2.3.1

3.2.3.1 **Baies non protégées**

« Sous réserve des articles 3.2.3.10. à 3.2.3.12., la surface de baies non protégées pour la distance limitative applicable à la façade de rayonnement considérée ne doit pas dépasser la valeur indiquée… »

Code de construction du Québec, chapitre I — Bâtiment — Québec — CNB 2020 modifié, en vigueur le 17 avril 2025

PROTOTYPE 3 — ARTICLE 3.2.3.1

manque pour conclure: distance limitative mesurée, surface de la façade de rayonnement

Lire le texte officiel | Copier | 1 commentaire

FRANK QUOTES

The article word for word, with its code edition and the date it came into force.

THEN STOPS SHORT

It names what is still missing and links to the official text. The architect concludes.

Instead of a pass or fail stamp, the feature that demos best. **Cost.** A weaker demo, but nothing the architect has to take on trust.

Outcome

WHAT EXISTS

Centralizing disconnected information.

104

units on the real permit set, 8 floors, 2 basements and a roof

7

drawing layers per floor, from survey to ventilation

3

prototypes in six days, two tested with the users

2

testers. One office. Results are theirs, not a market's.

REAL

Plans, model and engineering sheets of one real project. Area tables, conflicts, façade quantities, codes, comments, schedule.

SIMULATED

AutoCAD and SketchUp. Their screens are web pages in host chrome, labelled “simulated”. Writes to drawings are proposals only.

Open prototype 3 `/prototypes/prototype 3.html` ↗

THE PROJECT ARCHIVE: 114 HTMLS

Every decision has a record I can go back to.

Each page I built is kept in the order I made it: the options I compared, each component in its different states, and the one I chose. The project now has a history of every decision and of what drove it.

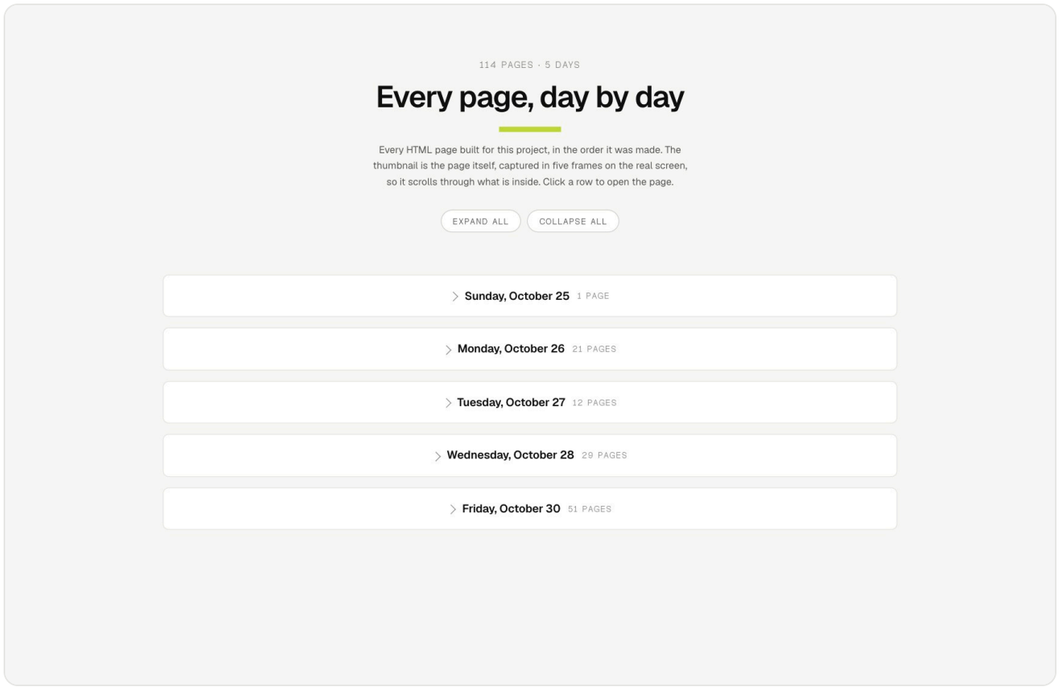

`Day by day` One row per day, from October 25 to 30.

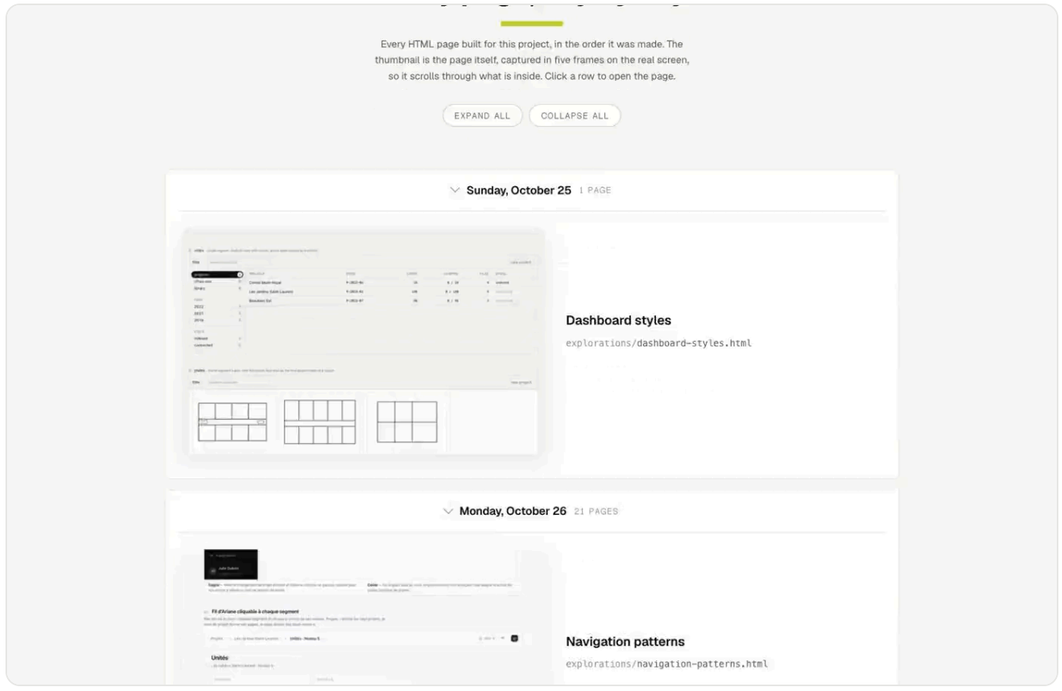

`Every page` Each thumbnail plays through the page it opens.

Open the archive `/prototypes/archive.html` ↗

WHAT COMES NEXT

From a vibecoded app to something that could actually help my dad save money.

The unit schedule

By hand — 5 h
With Frank — 30 min

104 units retraced and retyped each revision. Frank reads them from the DXF; a technician checks the flagged ones. **Needs:** reading the files directly.

The code study

By hand — 12 h
With Frank — 4 h

About ten pages rewritten. Frank fills in the measurements and names what is missing; the architect still concludes. **Needs:** a Québec code consultant's review.

Checking the drawings

By hand — 6 h
With Frank — 1 h

43 engineering sheets laid over the plans by eye. Frank lists the conflicts; a person confirms each one. **Needs:** native AutoCAD and SketchUp palettes.

23 h → 5.5 h

Per revision, for the three tasks above.

≈ 105 h

Saved over a project revised six times.

≈ $5,800

Of technician time per project, at $55 an hour.

Estimates, not measurements: based on Le Baldwin III (104 units, 8 floors, 43 engineering sheets) and on what Guy and Benoît described. Testing prototype 3 on a live project would measure them.

DESIGN CASE STUDY

Frank

Frank Prototype 1 `cafitte-prototype1.vercel.app`

Frank Prototype 2 `cafitte-prototype2.vercel.app`

Frank Prototype 3 `/prototypes/prototype 3.html`

Harvard / MIT Architecture portfolio `davidlafond.xyz`

David Lafond `davidlaf@mit.edu`

LAFOND ARCHITECTE